

**Dominion Exploration & Production, Inc.**  
**P.O. 1360**  
**Roosevelt, UT 84066**

August 7, 2003

Utah Division of Oil, Gas, & Mining  
1594 West North Temple, Suite 1210  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL  
HILLCREEK UNIT 2-29F  
NW/NE, SEC. 29, T10S, R20E  
UINTAH COUNTY, UTAH  
LEASE NO.: U-28203  
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the above-referenced well.

All further communication regarding the permit for this well, including the 7-day letter, communication regarding approval, and the approved APD should be directed to:

Ed Trotter, Agent  
P.O. Box 1910  
Vernal, UT 84078  
Phone: (435)789-4120  
Fax: (435)789-1420

Sincerely,



Ed Trotter  
Agent

**Dominion Exploration & Production, Inc.**

Attachments

UDOGM

RECEIVED  
AUG 11 2003  
DIV. OF OIL, GAS & MINING

001

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-28203
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		6. If Indian, Allottee or Tribe Name Ute Indian Tribe
2. Name of Operator Dominion Exploration & Production, Inc.		7. If Unit or CA Agreement, Name and No. Hill Creek Unit
3a. Address 14000 Quail Spgs Parkway, Okla.City, OK 73134		8. Lease Name and Well No. HCU 2-29F
3b. Phone No. (include area code) 405-749-1300		9. API Number 43-047-35131
4. Location of Well (Report location clearly and in accordance with any state requirements.) At surface 4419956 Y 550' FNL & 2456' FEL, NW/NE 612157 X 39.92417 At proposed prod. zone -109.68757		10. Field and Pool, or Exploratory Natural Buttes
14. Distance in miles and direction from nearest town or post office* 14.9 miles South of Ouray		11. Sec., T., R., M., or Blk and Survey or Area 29-10S-20E
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drlg. unit line, if any) 550'	16. No. of Acres in lease 1880	17. Spacing Unit dedicated to this well 40
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1100'	19. Proposed Depth 8,000	20. BLM/BIA Bond No. on file 76S 63050 0330
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5178'	22. Approximate date work will start* 15-Apr-04	23. Estimated duration 45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).    |
| 2. A Drilling Plan.   | 5. Operator certification.   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature <i>Carla Christian</i>	Name (Printed/Typed) Carla Christian	Date August 7, 2003
Title Regulatory Specialist		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed/Typed) BRADLEY G. HILL	Date 08-18-03
Title ENVIRONMENTAL SCIENTIST III		


Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED  
AUG 11 2003  
DIV. OF OIL, GAS & MINING

T10S, R20E, S.L.B.&M.

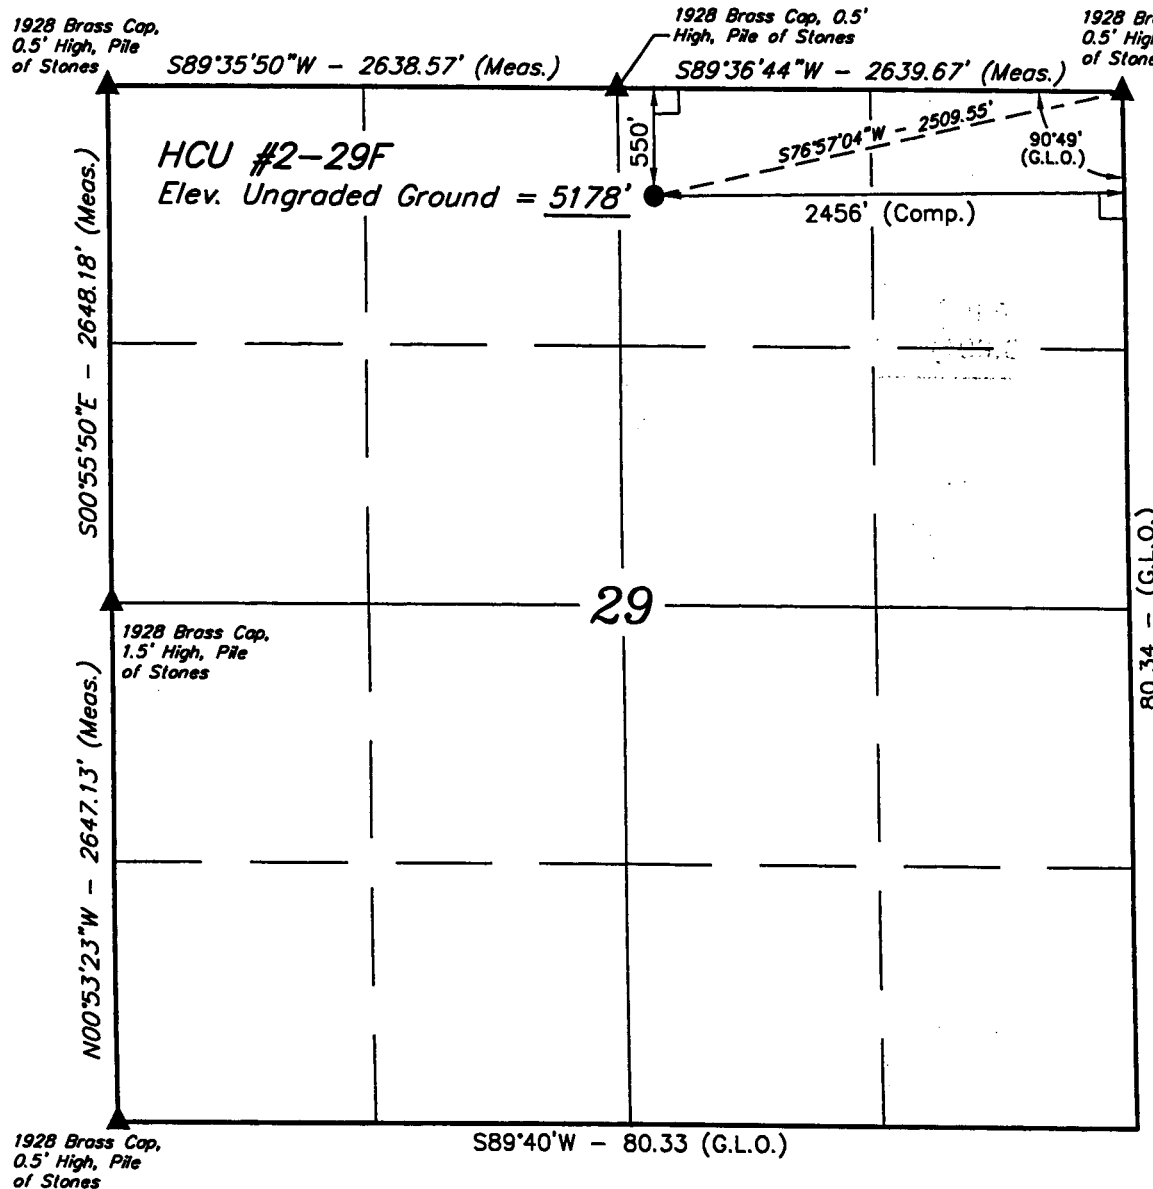

**LEGEND:**

- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
 LATITUDE = 39°55'26.17" (39.923936)  
 LONGITUDE = 109°41'17.27" (109.688131)

**DOMINION EXPLR. & PROD., INC.**


Well location, HCU #2-29F, located as shown in the NW 1/4 NE 1/4 of Section 29, T10S, R20E, S.L.B.&M. Uintah County, Utah.

**BASIS OF ELEVATION**

SPOT ELEVATION AT THE NORTHWEST CORNER OF SECTION 29, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NW QUADRANGLE, UTAH, UINTAH COUNTY 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5251 FEET.


**BASIS OF BEARINGS**

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



**CERTIFICATE**

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME, OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE, AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



**UINTAH ENGINEERING & LAND SURVEYING**  
 85 SOUTH 200 EAST - VERNAL, UTAH 84078  
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 04-07-03	DATE DRAWN: 04-10-03
PARTY D.K. J.A. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE DOMINION EXPLR. & PROD., INC.	

## DRILLING PLAN

### APPROVAL OF OPERATIONS

#### Attachment for Permit to Drill

**Name of Operator:** Dominion Exploration & Production  
**Address:** 14000 Quail Springs Parkway, Suite 600  
Oklahoma City, OK 73134  
**Well Location:** HCU 2-29F  
550' FNL & 2456' FEL  
Section 29-10S-20E  
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	1,075'
Wasatch Tongue	3,985'
Green River Tongue	4,315'
Wasatch	4,475'
Chapita Wells	5,375'
Uteland Buttes	6,575'
Mesaverde	7,675'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	1,075'	Oil
Wasatch Tongue	3,985'	Oil
Green River Tongue	4,315'	Oil
Wasatch	4,475'	Gas
Chapita Wells	5,375'	Gas
Uteland Buttes	6,575'	Gas
Mesaverde	7,675'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	13-3/8"	48.0 ppf	H-40	STC	0'	500'	17-1/2"
Intermediate	8-5/8"	32.0 ppf	J-55	LTC	0'	2,200'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,000'	7-7/8"

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized.

Intermediate hole: To be drilled using a diverter stack with rotating head to divert flow from rig floor.

Production hole: Prior to drilling out the intermediate casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

## DRILLING PLAN

### APPROVAL OF OPERATIONS

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

#### 6. MUD SYSTEMS

- An air or an air/mist system may be used to drill to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' - 500'	8.4	Air foam mist, no pressure control
500' - 2,200'	8.6	Fresh water, rotating head and diverter
2,200' - 8,000'	8.6	Fresh water/2% KCL/KCL mud system

#### 7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a contant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

#### 8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

#### 9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to intermediate casing.
- The gamma ray will be left on to record from total depth to intermediate casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to intermediate casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

#### 10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500–2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H2S gas.

#### 11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

## DRILLING PLAN

### APPROVAL OF OPERATIONS

#### 12. CEMENT SYSTEMS

##### a. Surface Cement:

Drill 17-1/2" hole to 500' and cement 13-3/8" to surface with 450 sks class "C" cement with 2% CaCl<sub>2</sub> and 1/4 #/sk. Poly-E-Flakes (volume includes 40% excess). Top out if necessary with Top Out cement listed below.

##### b. Intermediate Casing Cement:

- Drill 12-1/4" hole to 2,200'±, run and cement 8-5/8" to surface.
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement to surface not required due to surface casing set deeper than normal.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	385	0'-1,700'	11.0 ppg	3.82 CFS	733 CF	1,466 CF	100%
Tail	370	1,700'-2,200'	15.6 ppg	1.20 CFS	220 CF	440 CF	100%

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.  
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.  
Water requirement: 22.95 gal/sack  
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.  
Pump Time: 1 hr. 5 min. @ 90 °F.  
Compressives @ 95 °F: 24 Hour is 4,700 psi

##### c. Production Casing Cement:

- Drill 7-7/8" hole to 8,000'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,000'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: Caliper will be run to determine exact cement volume.


Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.  
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.  
Water requirement: 17.71 gal/sack  
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.  
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.  
Water requirement: 9.09 gal/sack  
Compressives @ 165°F: 905 psi after 24 hours


#### 13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: April 15, 2004  
Duration: 14 Days

## BOP STACK

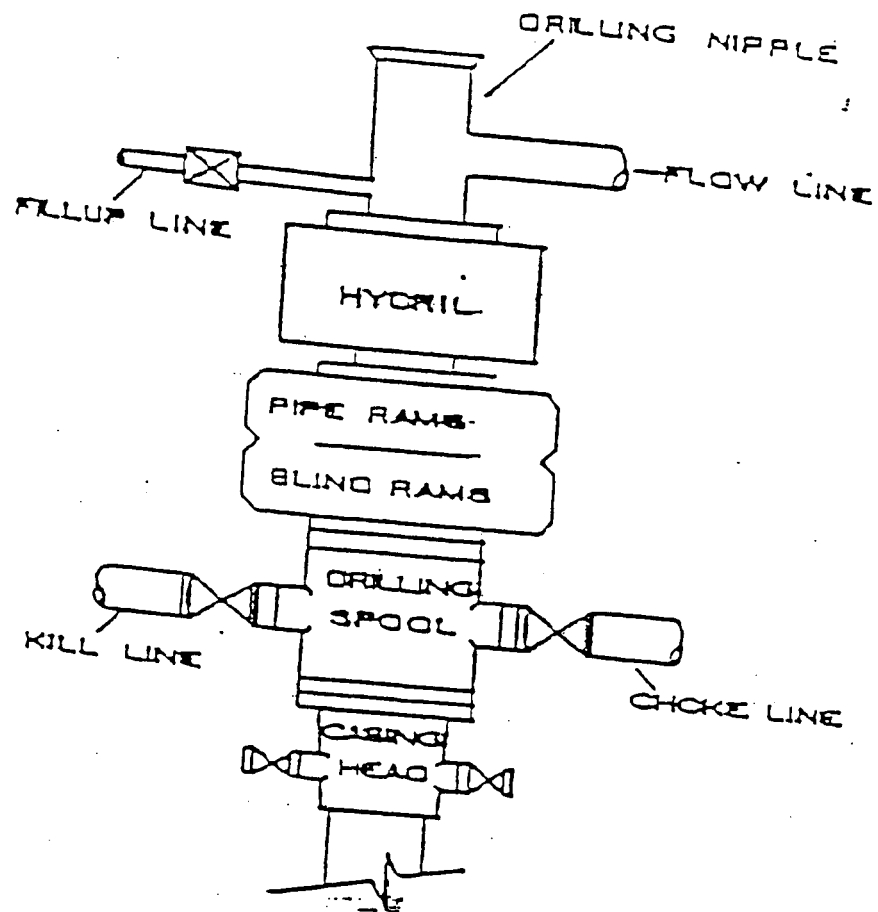

## CHOKE MANIFOLD

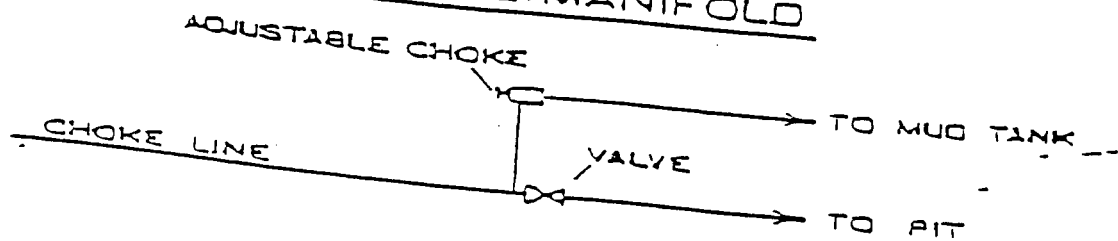


CONFIDENTIAL

# CONFIDENTIAL

## LEGEND

O = Oil Line  
 G = Gas Line  
 W = Water Line  
 R = Relief Line (Pressure)  
 C = Condensate Line  
 V = Vent Line  
 D = Drain Line  
 M = Gas Meter  
 P = Pump  
 BP = Back Pressure Valve  
 SWS = Sealed When Shipping  
 SUS = Sealed Unless Shipping  
 T = Heat Traced Line  
 H = Heater  
 BL = Buried Line  
 X = Valve  
 ↗ = Check Valve  
 SC = Sealed Closed Valve  
 NC = Normally Closed  
 BD = Blowdown Line

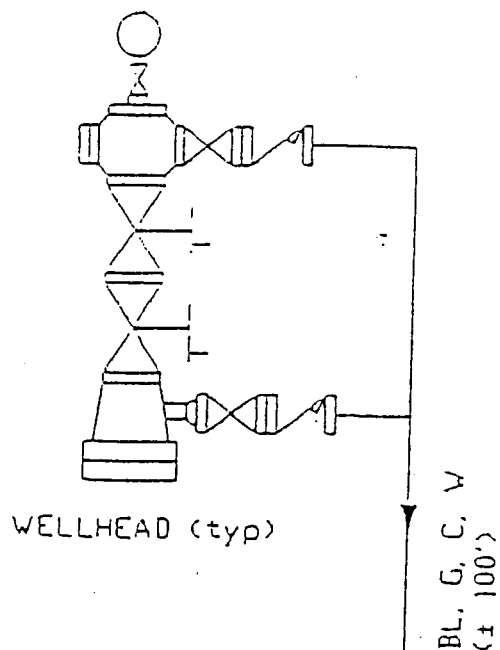

PIT  
30' x 30'  
(typ)

BD, BL

W, BL

SEP

BL, C

GLYCOL  
REBOILER  
&  
CONTACT  
TOWER

GAS SALES LINE

400 bbl Tank  
(Condensate)

Relief

SC

SUS

The site security plan is on file in DEPI's district office located at 1400 N. State St., Roosevelt, Utah. It can be inspected during office hours, from 6:30 AM thru 3:30 PM, Monday thru Friday..

DOMINION EXPLORATION & PRODUCTION, INC.

RIVER BEND FIELD, UINTA COUNTY

not to scale

TYPICAL FLOW DIAGRAM

100-100-100



# DOMINION EXPLR. & PROD., INC.

RBU #2-29F

SECTION 29, T10S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN RIGHT AND PROCEED IN A NORTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 2.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.15 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE WEST; FOLLOW ROAD FLAGS IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.15 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 46.1 MILES.

**CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL**

Company/Operator:	<u>Dominion Exploration &amp; Production, Inc.</u>
Well Name & Number:	<u>Hill Creek Unit 2-29F</u>
Lease Number:	<u>U-28203</u>
Location:	<u>550' FNL &amp; 2456' FEL, NW/NE, Sec. 29, T10S, R20E, S.L.B.&amp;M., Uintah County</u>
Surface Ownership:	<u>Ute Indian Tribe</u>

**NOTIFICATION REQUIREMENTS**

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and  
Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related  
Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production  
Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

## **SURFACE USE PROGRAM**

### **1. EXISTING ROADS**

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 14.9 miles south of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### **2. PLANNED ACCESS ROAD**

- A. The access road will be approximately 0.15 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way.

Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent

intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Dominion Exploration & Production, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Disposal wells – 1\*
- B. Producing wells - 17\*
- C. Shut in wells – 1\*

(\*See attached TOPO map “C” for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, separator and dehy units with meter, 400 barrel vertical condensate tank, and attaching piping.
- 2. Gas gathering lines - A 4” gathering line will be buried from dehy to the edge of the location.
- 3. Surface pits – After the well is hydraulically fraced, it will be flowed back into the surface pits. After first production, a 400 barrel tank will be installed to contain produced waste water.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 4” OD steel above ground natural gas pipeline will be laid approximately 814’ from proposed location to a point in the NW/NE of Section 29, T10S, R20E, where it will tie into Questar Pipeline Co.’s existing line. Proposed pipeline crosses Ute Indian Tribe lands within the Hill Creek Unit, thus a Right-of -Way grant will be required.
- 3. Proposed pipeline will be a 4” OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike

of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the Southeast end of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Desert Brown.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water source will be from Water Permit No. 43-10447 located in Sec. 9, T8S, R20E, Uintah County, Utah.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Tribal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined or unlined pit or storage tank for a period not to exceed 90 days after initial production. After the 90-day period, the produced water will be contained in a tank on location and then disposed of at Ace Disposal, MCMC Disposal or Dominion's RBU 16-19F Disposal Well.

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

**On Ute Indian Tribe administered land:**

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

**8. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

**9. ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

**10. WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the Southwest corner of the location. The flare pit will be located downwind of the prevailing wind direction on the West side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled location topsoil will be stored between Corners C and 6 of the location.

Access to the well pad will be from the North.

Corners #2, #6, & #8 will be rounded off to minimize excavation.

## 11. FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

## 12. PLANS FOR RESTORATION OF SURFACE

### A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.

The reserve pit will be reclaimed within 12 months from the date of well completion. Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

### B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

13. **SURFACE OWNERSHIP**

Access road: Tribal

Location: Tribal

14. **OTHER INFORMATION**

A. Dominion Exploration & Production, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;

- the mitigation measures the operator will likely have to undertake before the site can be used.

- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs.

The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, Dominion Exploration & Production, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make



arrangements for permanent storage on commercial facilities. (The BIA does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

**Additional Surface Stipulations**

None

**LESSEE'S OR OPERATOR'S REPRESENTATIVE**

---

**CONTACTS:**

**OPERATIONS**

Mitchiel Hall  
P.O. Box 1360  
Roosevelt, UT 84066  
Telephone: (435) 722-4521  
Fax : (435) 722-5004

**PERMITTING**

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Telephone: (435) 789-4120  
Fax: (435) 789-1420


All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Dominion Exploration & Production, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

**CERTIFICATION:**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with operations proposed herein will be performed by Dominion Exploration & Production, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Date 8-7-2003


  
\_\_\_\_\_  
Ed Trotter, Agent

Dominion Exploration & Production, Inc.

## SELF-CERTIFICATION STATEMENT

Under Federal regulation, effective June 15, 1988, designation of operator forms are no longer required when the operator is not the 100% record title holder. An operator is now required to submit a self-certification statement to the appropriate office stating that said operator has the right to operate upon the leasehold premises. Said notification may be in the following format:

Please be advised that **Dominion Exploration & Production, Inc.** is considered to be the operator of **Well No. 2-29F**, located in the **NW ¼ NE ¼ of Section 29, T10S, R20E in Uintah County; Lease No. U-28203**; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Travelers Casualty and Surety Company of America, Bond #76S 63050 0330.

A handwritten signature in cursive script that reads "Carla Christian". The signature is written in dark ink and is positioned above the printed name and title.

Carla Christian  
Regulatory Specialist

# DOMINION EXPLR. & PROD., INC.

HCU #2-29F

LOCATED IN UINTAH COUNTY, UTAH  
SECTION 29, T10S, R20E, S.1.B.&M.

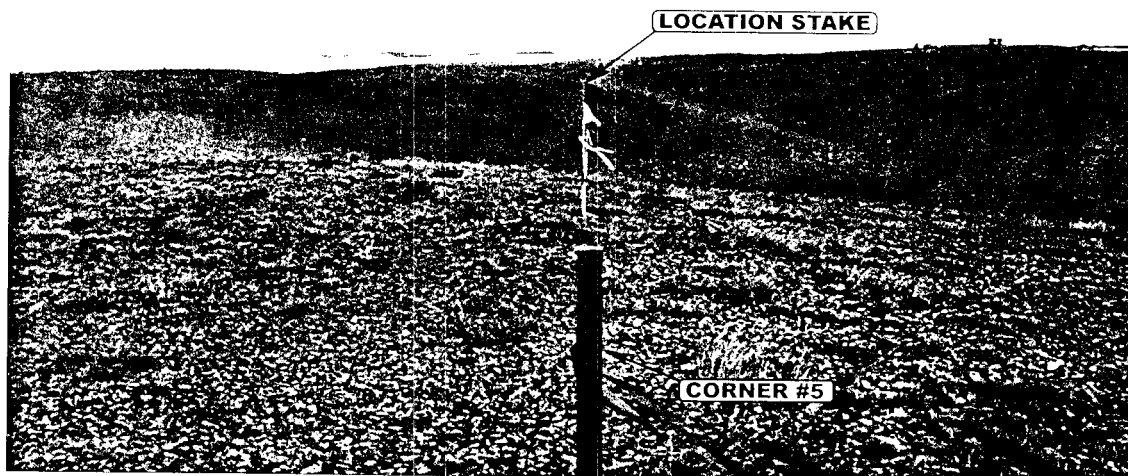


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY

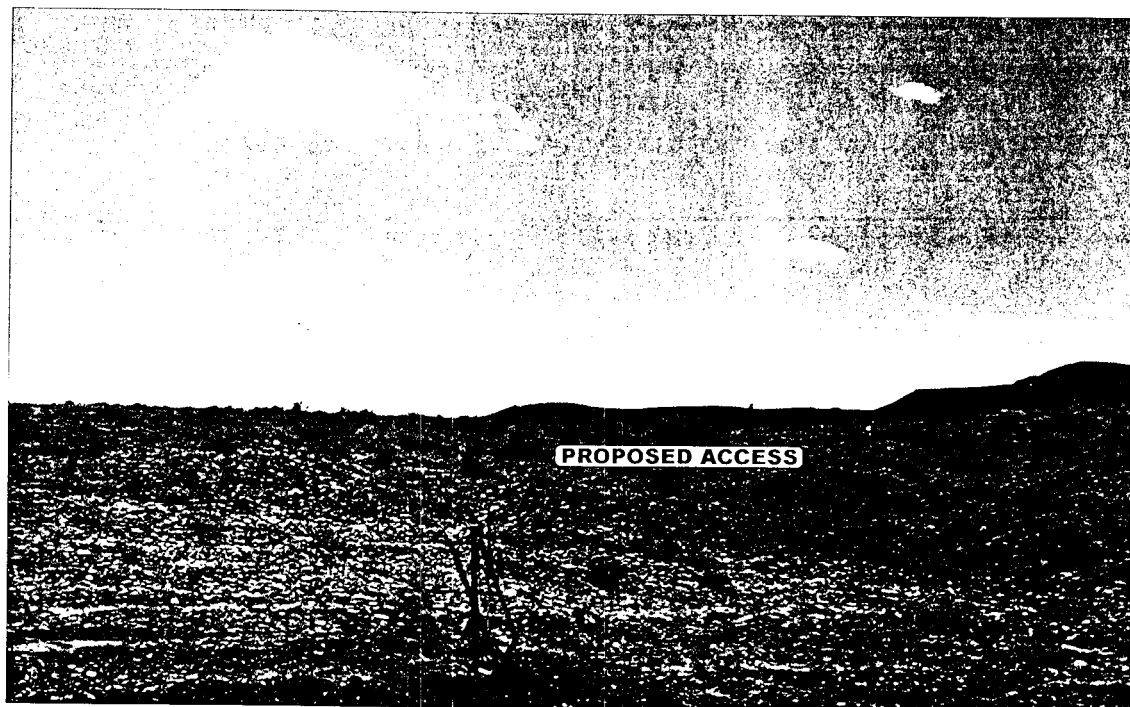


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

UELS

Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

04 26 03  
MONTH DAY YEAR

PHOTO

TAKEN BY: D.K.

DRAWN BY: P.M.

REVISED: 00-00-00

## LOCATION LAYOUT FOR

SECTION 29, T10S, R20E, S.L.B.&amp;M.

Approx.  
Toe of  
Fill Slope

Approx.  
Top of  
Cut Slope

*Proposed Access Road*

*F-12.1'*  
*El. 55.5'*

Sta. 3+55

*Existing /  
Drainage*

**F-9.3'**  
**El. 58.3'**

Sta. 1+80

El. 74.0'  
C-14.4'  
(blm. pit)

El. 68.7'  
C-9.1'  
(btm. pit)

**Pit Capacity With  
2' of Freeboard  
is 10,040 Bbls. ±**

**RESERVE PITS**  
(8' Deep)

20' WIDE BENCH

### *Subsoil Stockpile*

C-1.7'  
El. 69.3'

***F-0.8'***  
***El. 66.8'***

**Sta. 0+52**

*/Round Corners  
as Needed \*

Sta. 0+00

**F-13.2'**  
**El. 54.4'**

Elev. Ungraded Ground at Location Stake = 5178.3'  
Elev. Graded Ground at Location Stake = 5167.6'

**UINTAH ENGINEERING & LAND SURVEYING**  
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017


# DOMINION EXPLR. & PROD., INC.

## TYPICAL CROSS SECTIONS FOR

HCU #2-29F






SECTION 29, T10S, R20E, S.L.B.&M.

550' FNL 2456' FEL



DATE: 04-10-03

Drawn By: D.COX

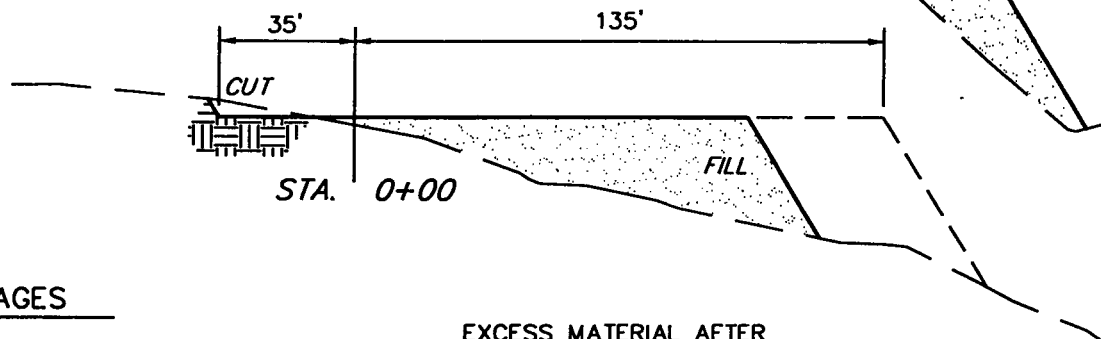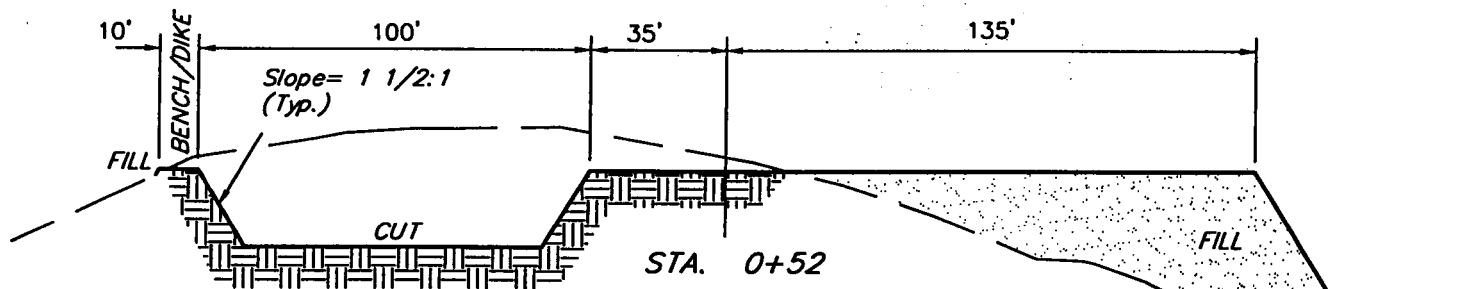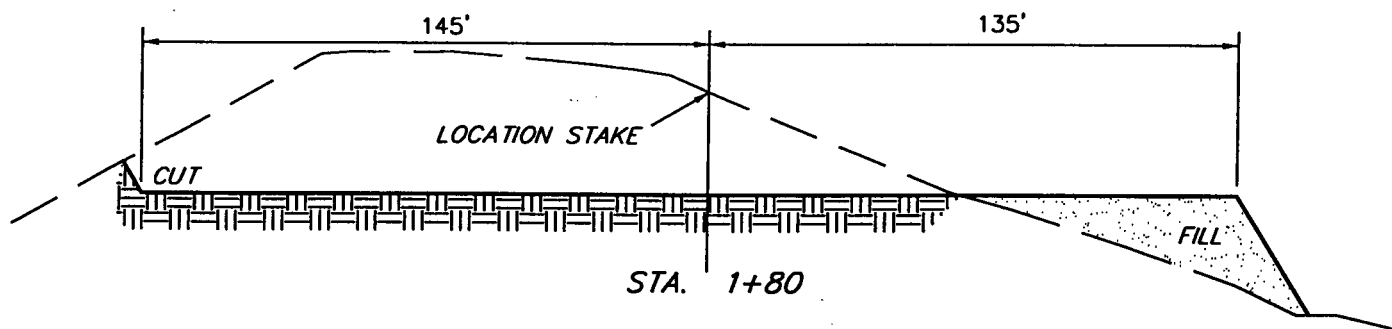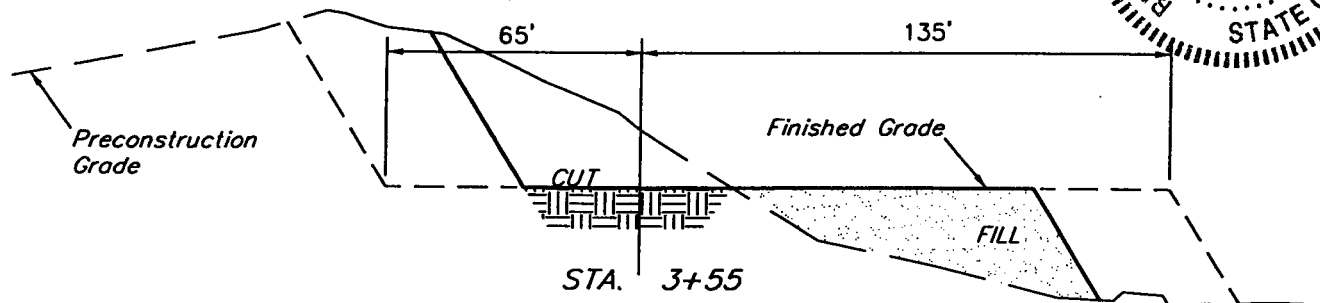

### APPROXIMATE YARDAGES

#### CUT

(12") Topsoil Stripping = 3,140 Cu. Yds.

Remaining Location = 16,470 Cu. Yds.

TOTAL CUT = 19,610 CU.YDS.

FILL = 14,190 CU.YDS.

EXCESS MATERIAL AFTER  
5% COMPACTION

= 4,670 Cu. Yds.

Topsoil & Pit Backfill  
(1/2 Pit Vol.)


= 4,670 Cu. Yds.

EXCESS UNBALANCE  
(After Rehabilitation)

= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING

85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

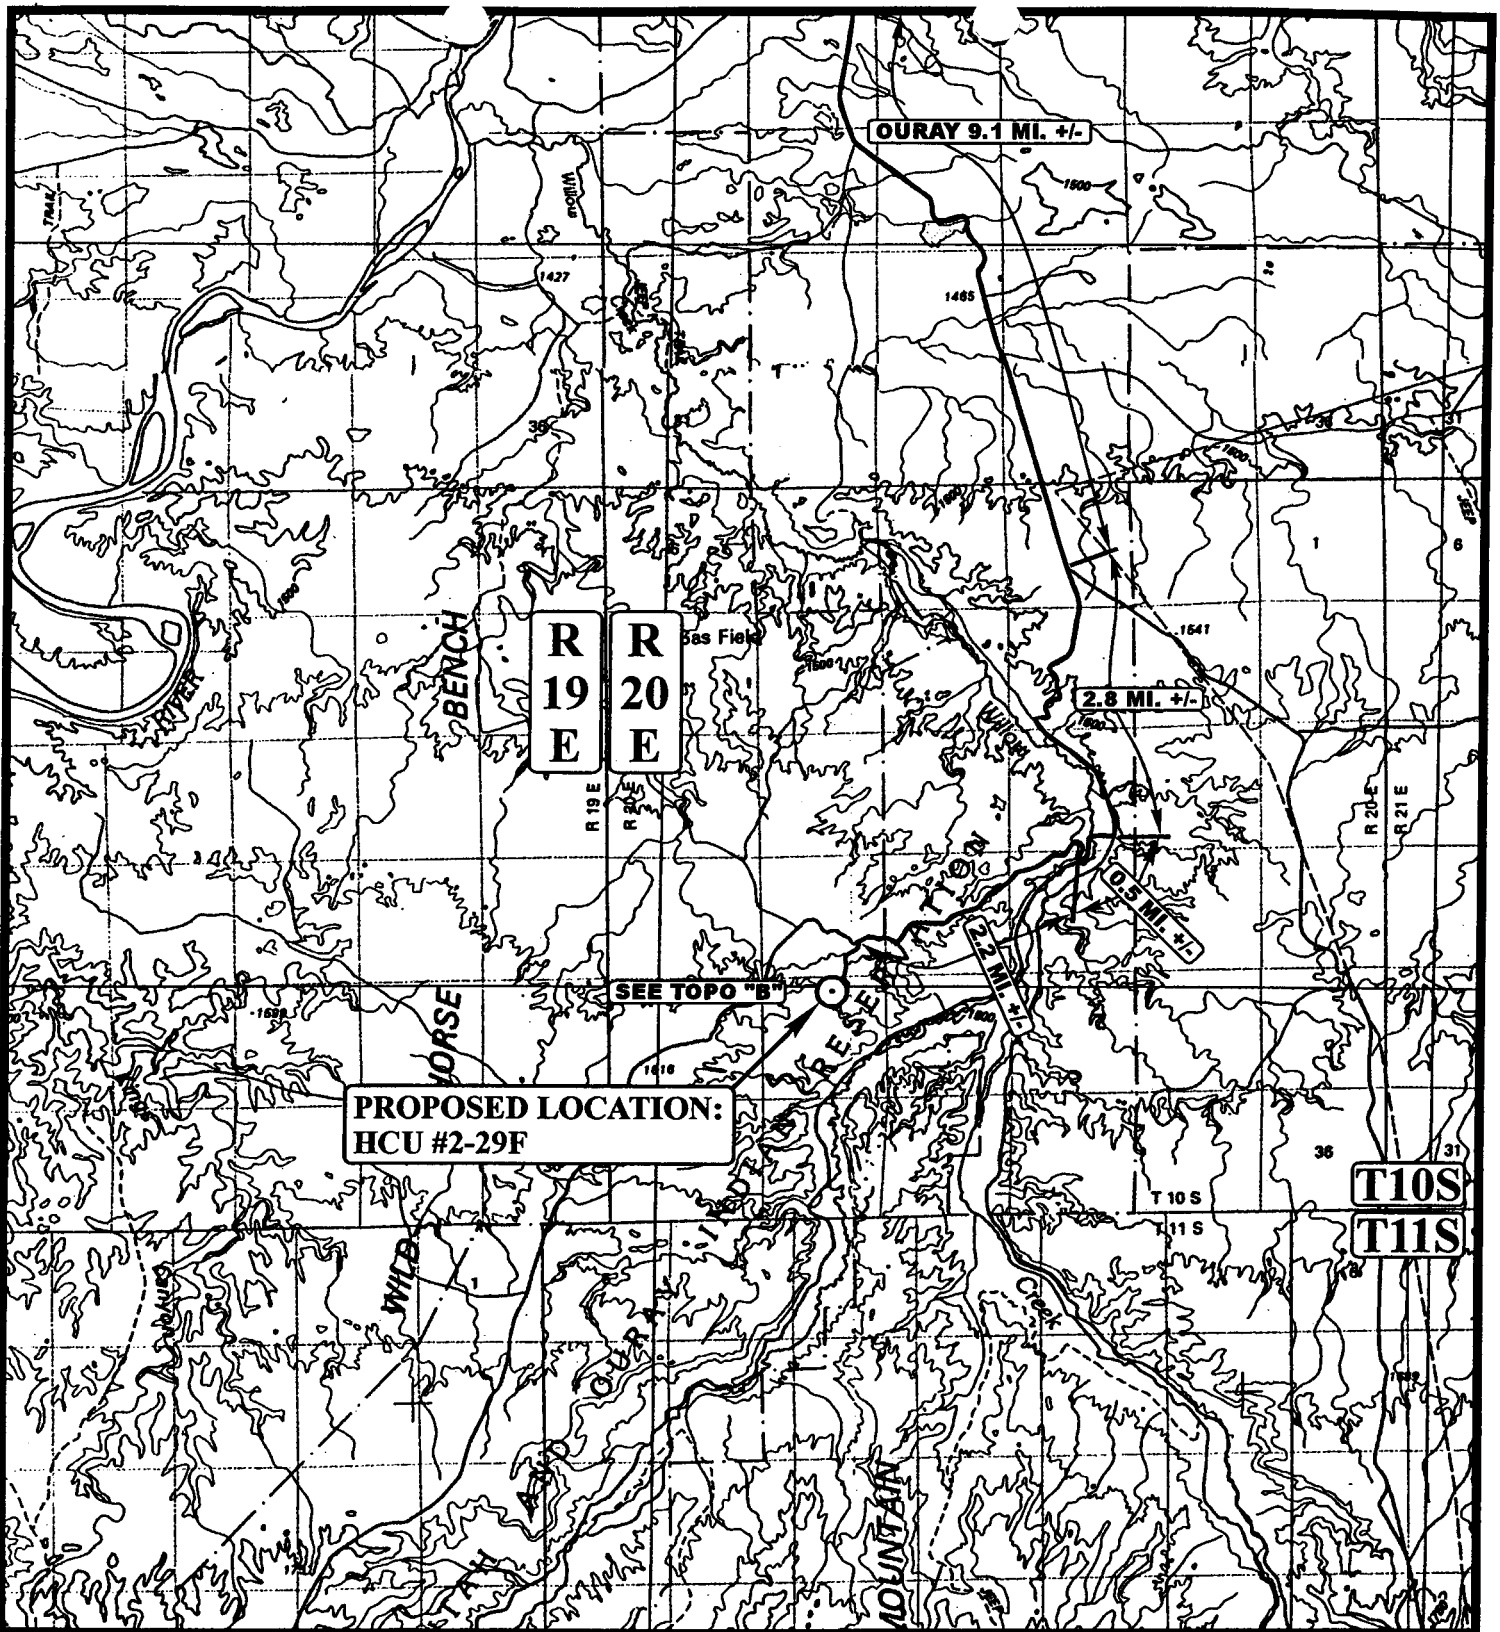

**LEGEND:**

○ PROPOSED LOCATION



**DOMINION EXPLR. & PROD., INC.**

**HCU #2-29F**

**SECTION 29, T10S, R20E, S.L.B.&M.**

**550' FNL 2456' FEL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC**  
**MAP**

**04** **26** **03**  
MONTH DAY YEAR


SCALE: 1:100,000

DRAWN BY: P.M.

REVISED: 00-00-00



T10S

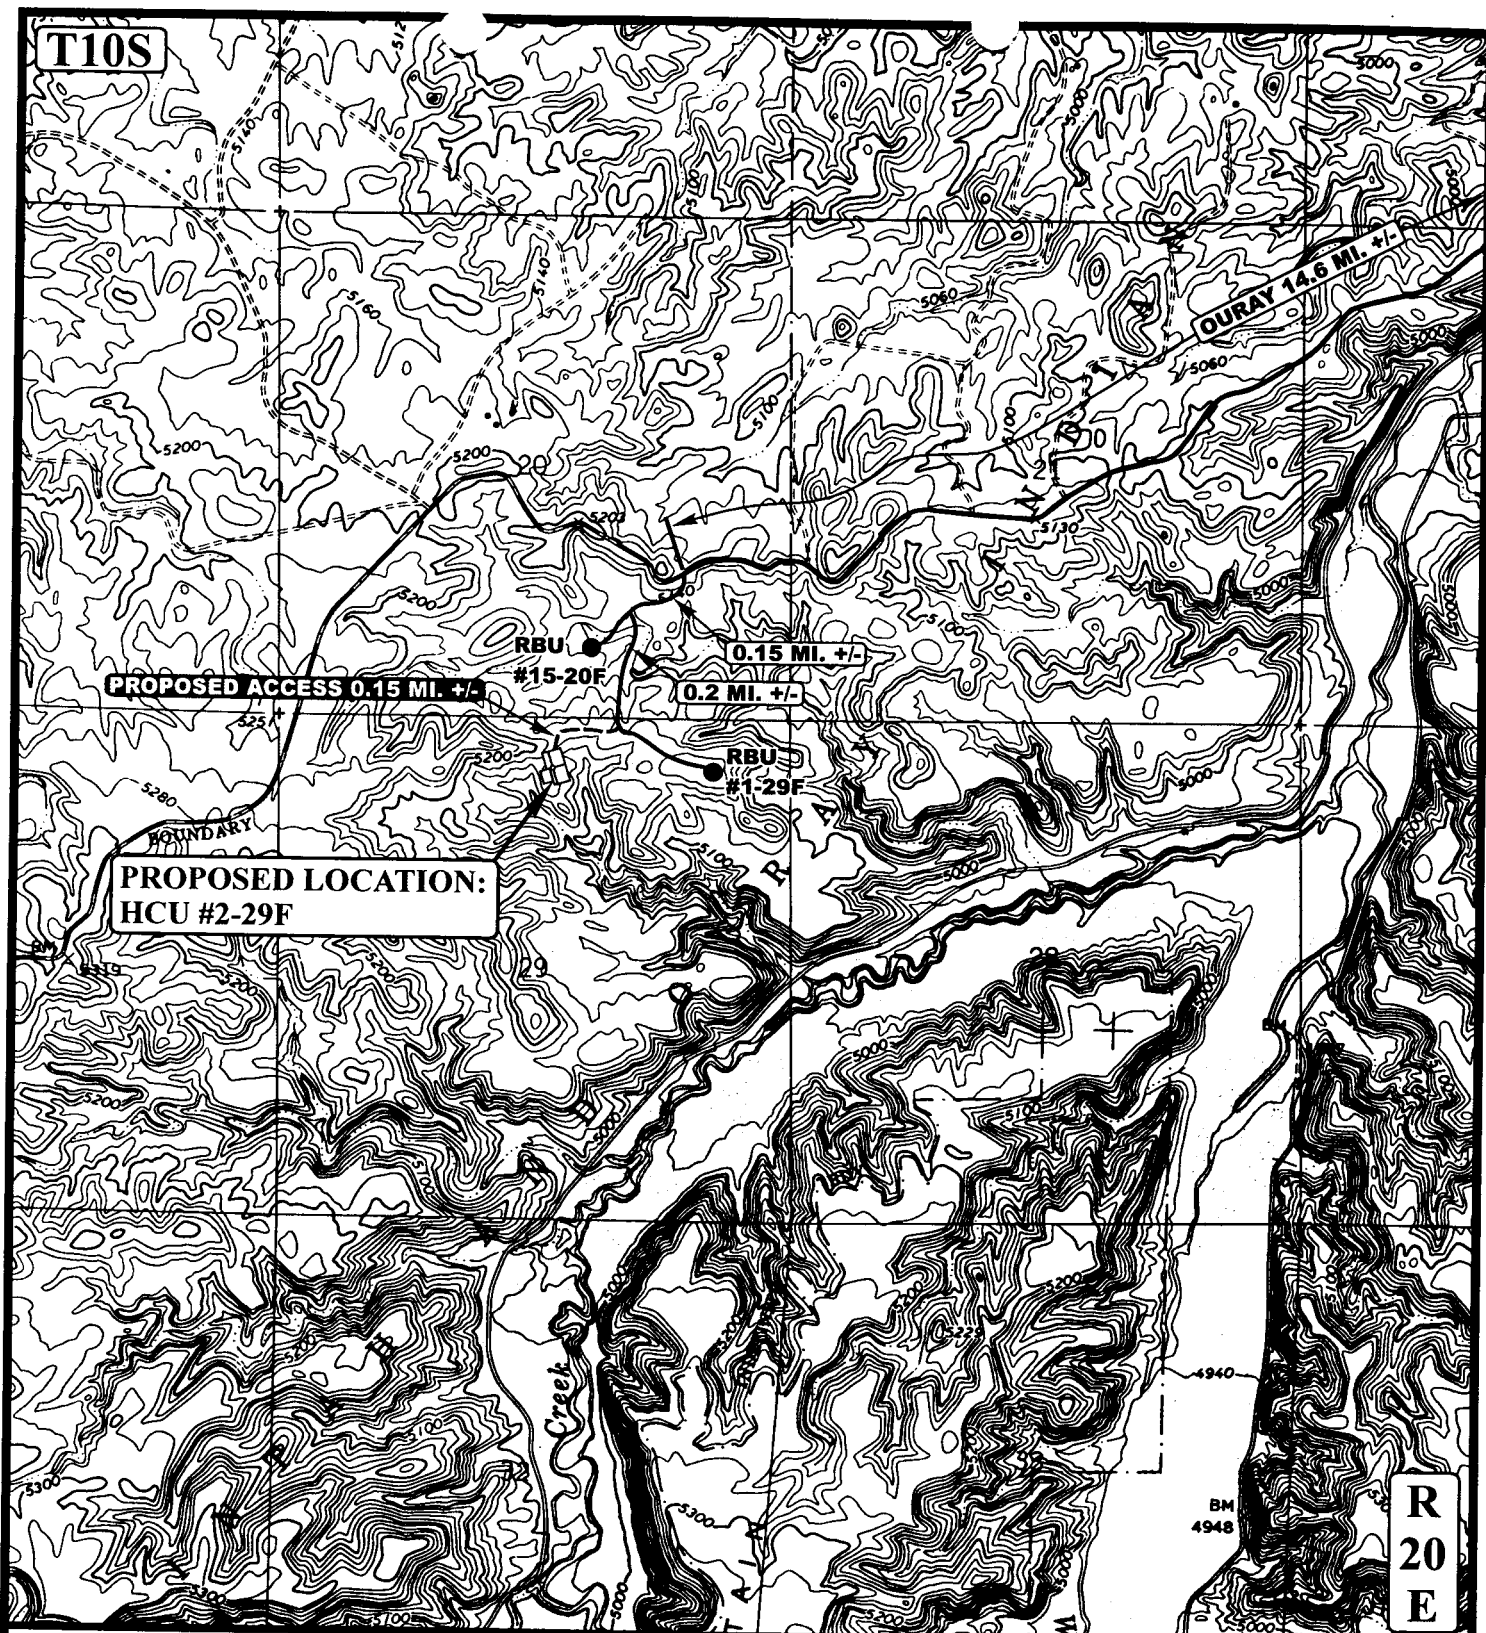

**LEGEND:**

- EXISTING ROAD  
- - - - - PROPOSED ACCESS ROAD

N

**DOMINION EXPLR. & PROD., INC.**

**HCU #2-29F**

**SECTION 29, T10S, R20E, S.L.B.&M.**

**550' FNL 2456' FEL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC  
MAP**


**04 26 03**  
MONTH DAY YEAR

**SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00**

**B  
TOPO**



**T10S**

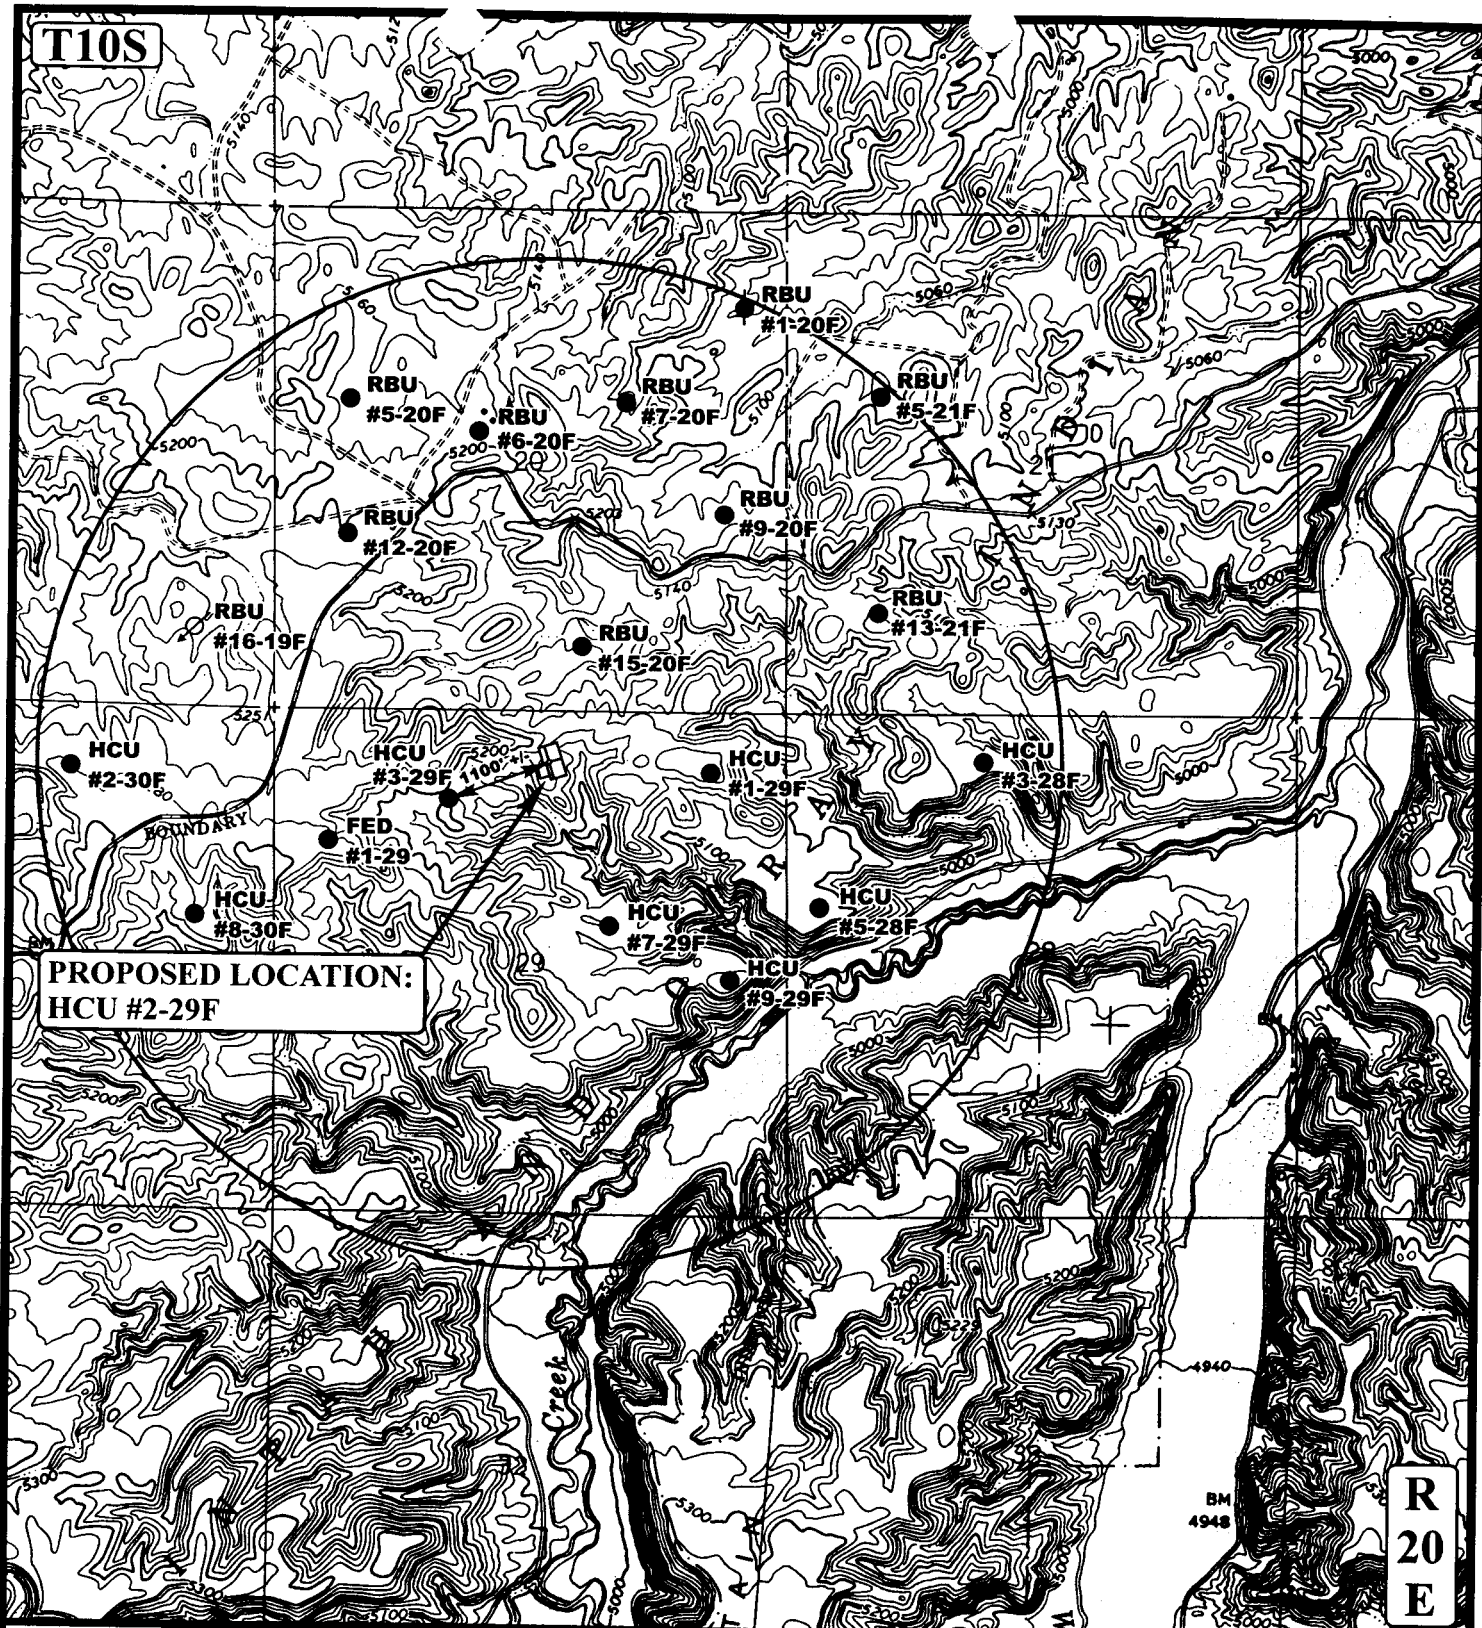

**LEGEND:**

- |                   |                         |
|-------------------|-------------------------|
| ○ DISPOSAL WELLS  | ○ WATER WELLS           |
| ● PRODUCING WELLS | ● ABANDONED WELLS       |
| ● SHUT IN WELLS   | ● TEMPORARILY ABANDONED |



**DOMINION EXPLR. & PROD., INC.**

**HCU #2-29F**  
**SECTION 29, T10S, R20E, S.L.B.&M.**  
**550' FNL 2456' FEL**



**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813


**TOPOGRAPHIC**  
**MAP**

04	26	03
MONTH	DAY	YEAR

**SCALE: 1" = 2000'** **DRAWN BY: P.M.** **REVISED: 00-00-00**

**C**  
**TOPO**



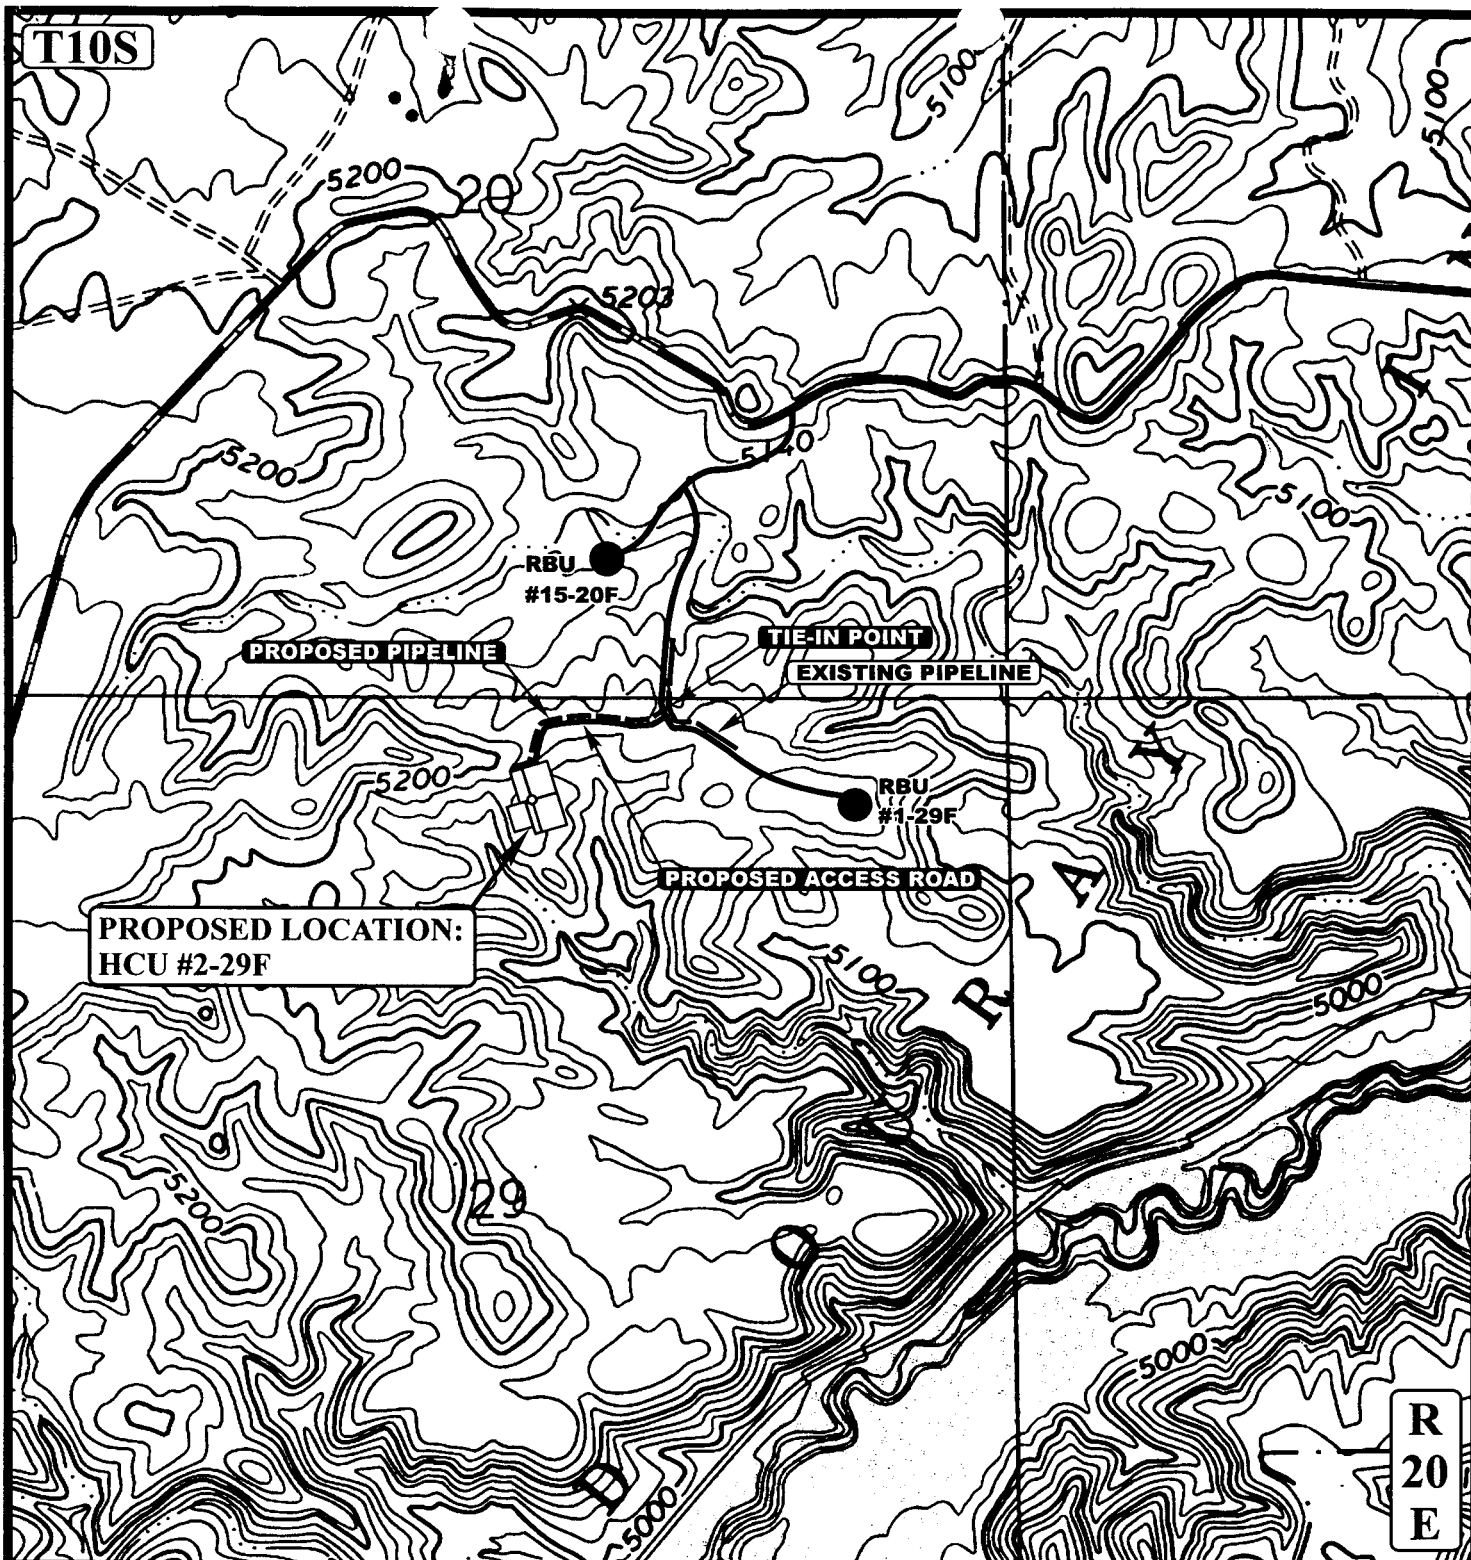

APPROXIMATE TOTAL PIPELINE DISTANCE = 814' +/-

# LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE



DOMINION EXPLR. & PROD., INC.

HCU #2-29F  
SECTION 29, T10S, R20E, S.L.B.&M.  
550' FNL 2456' FEL



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

TOPOGRAPHIC  
MAP

04 26 03  
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: P.M. REVISED: 00-00-00



004

**WORKSHEET**  
**APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 08/11/2003

API NO. ASSIGNED: 43-047-35131

WELL NAME: HCU 2-29F

OPERATOR: DOMINION EXPL &amp; PROD ( N1095 )

CONTACT: CARLA CHRISTIAN

PHONE NUMBER: 405-749-1300

## PROPOSED LOCATION:

NWNE 29 100S 200E

SURFACE: 0550 FNL 2456 FEL

BOTTOM: 0550 FNL 2456 FEL

UINTAH

NATURAL BUTTES ( 630 )

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-28203

SURFACE OWNER: 2 - Indian

PROPOSED FORMATION: MVRD

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.92417

LONGITUDE: 109.68757

## RECEIVED AND/OR REVIEWED:

☒ Plat  
☒ Bond: Fed[1] Ind[] Sta[] Fee[]  
 (No. 76S630500330 )  
☒ Potash (Y/N)  
☒ Oil Shale 190-5 (B) or 190-3 or 190-13  
☒ Water Permit  
 (No. 43-10447 )  
☒ RDCC Review (Y/N)  
 (Date: )  
☒ Fee Surf Agreement (Y/N)


## LOCATION AND SITING:

R649-2-3.  
 Unit HILL CREEK  
 R649-3-2. General  
 Siting: 460 From Qtr/Qtr & 920' Between Wells  
 R649-3-3. Exception  
☒ Drilling Unit  
 Board Cause No: 197-11  
 Eff Date: 8-17-2000  
 Siting: 460' from Unit boundary  
 R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

1- federal approved  
 2- Oil SHALE

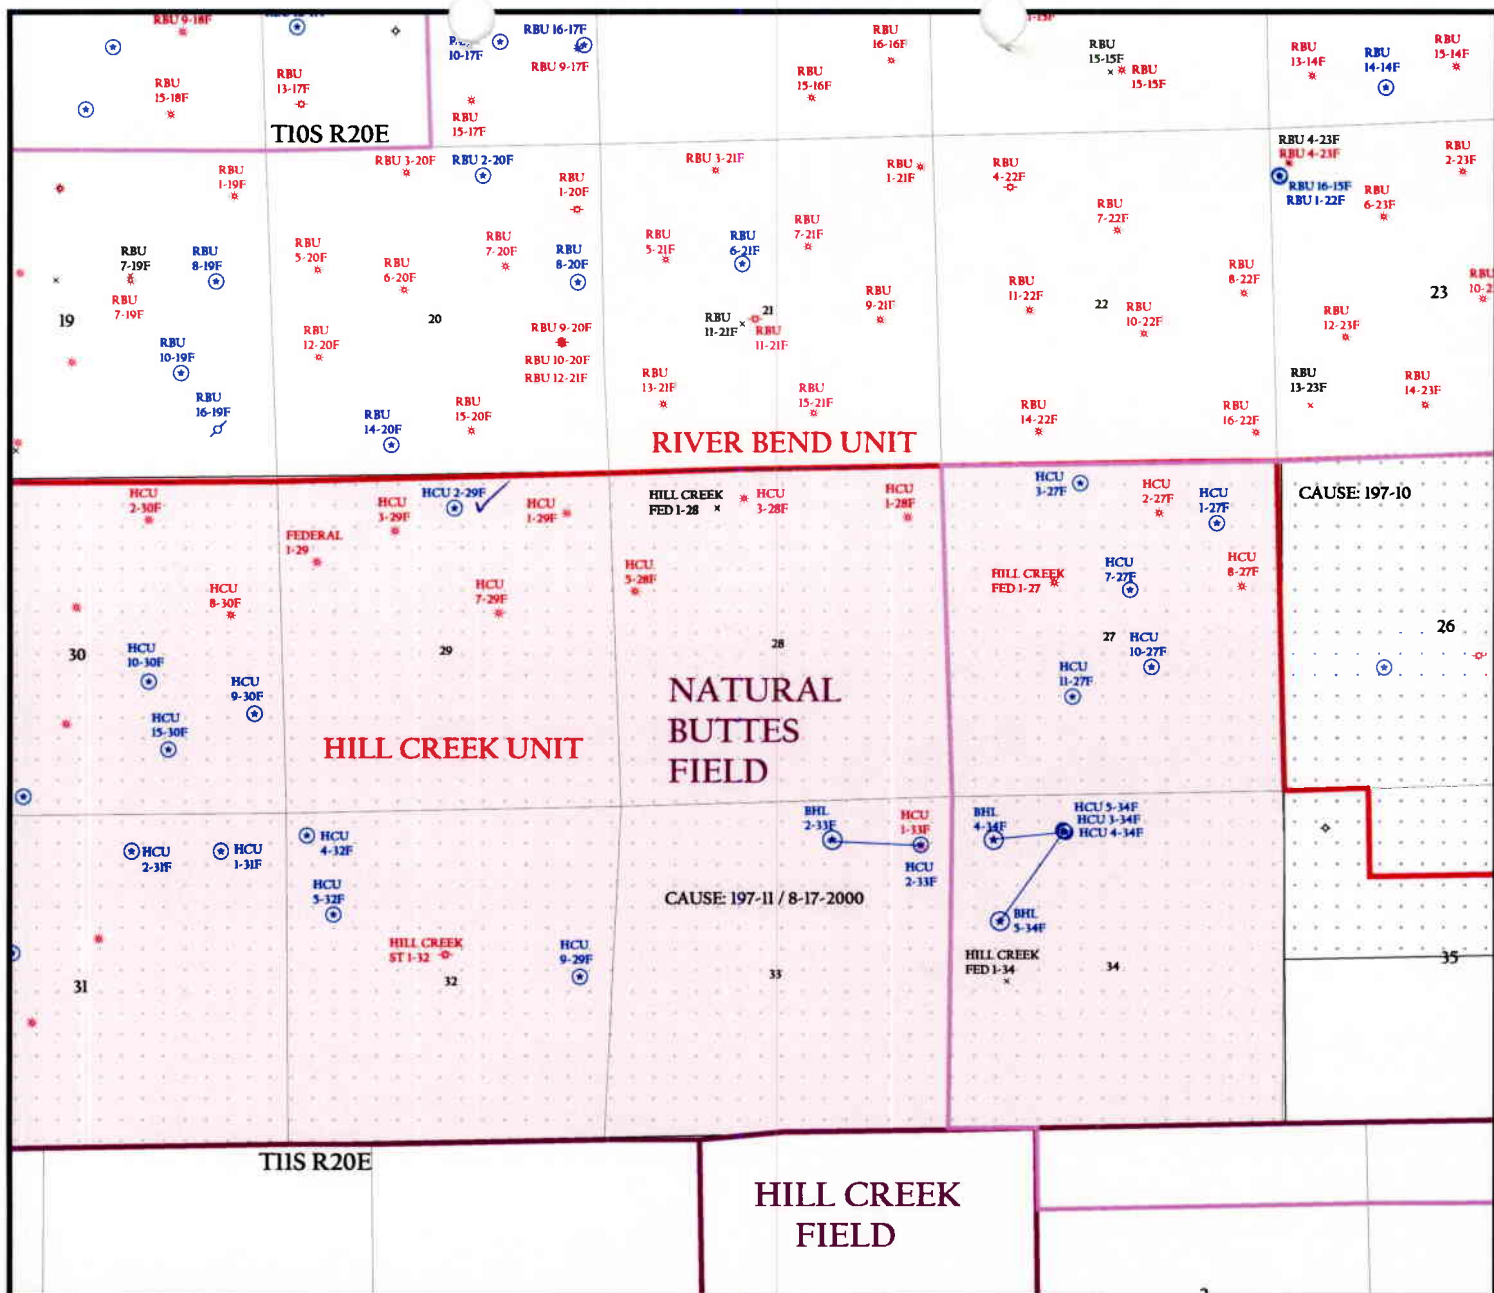

OPERATOR: DOMINION EXPL & PROD (N1095)

SEC. 29 T.10S, R.20E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 197-11 / 8-17-2000

#### Wells


- ✱ GAS INJECTION
- ✱ GAS STORAGE
- ✱ LOCATION ABANDONED
- ⊙ NEW LOCATION
- ✱ PLUGGED & ABANDONED
- ✱ PRODUCING GAS
- ✱ PRODUCING OIL
- ✱ SHUT-IN GAS
- ✱ SHUT-IN OIL
- ✱ TEMP. ABANDONED
- ✱ TEST WELL
- ✱ WATER INJECTION
- ✱ WATER SUPPLY
- ✱ WATER DISPOSAL

#### Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

#### Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

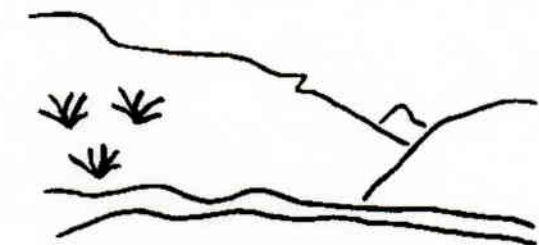

Utah Oil Gas and Mining



PREPARED BY: DIANA MASON  
DATE: 13-AUGUST-2003

## United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:  
3160  
(UT-922)

August 15, 2003

Memorandum

To: Assistant District Manager Minerals, Vernal District  
From: Michael Coulthard, Petroleum Engineer  
Subject: 2003 Plan of Development Hill Creek Unit,  
Uintah County, Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management. The following wells are planned for calendar year 2003 within the Hill Creek Unit, Uintah County, Utah.

Api Number	Well	Location
------------	------	----------

(Proposed PZ MesaVerde)

43-047-35130 HCU 11-27F Sec 27 T10S R20E 1599 FSL 1899 FWL  
43-047-35131 HCU 2-29F Sec 29 T10S R20E 0550 FNL 2456 FEL  
43-047-35132 HCU 9-30F Sec 30 T10S R20E 1606 FSL 0528 FEL  
43-047-35133 HCU 10-30F Sec 30 T10S R20E 2107 FSL 2201 FEL  
43-047-35134 HCU 1-31F Sec 31 T10S R20E 0611 FNL 1061 FEL  
43-047-35135 HCU 12-31F Sec 31 T10S R20E 1865 FSL 0609 FWL  
43-047-35136 HCU 5-32F Sec 32 T10S R20E 1618 FNL 0749 FWL

43-047-35137 HCU 2-33F Sec 33 T10S R20E 0777 FNL 0501 FEL  
BHL Sec 33 T10S R20E 0700 FNL 1900 FEL

43-047-35138 HCU 4-34F Sec 34 T10S R20E 0564 FNL 1771 FWL  
BHL Sec 34 T10S R20E 0700 FNL 0650 FWL

43-047-35139 HCU 5-34F Sec 34 T10S R20E 0579 FNL 1792 FWL  
BHL Sec 34 T10S R20E 2000 FNL 0750 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

(801) 538-5340 telephone

(801) 359-3940 fax

(801) 538-7223 TTY

[www.nr.utah.gov](http://www.nr.utah.gov)

Michael O. Leavitt  
Governor

Robert L. Morgan  
Executive Director

Lowell P. Braxton  
Division Director

August 18, 2003

Dominion Exploration & Production, Inc.  
14000 Quail Springs Parkway, Suite 600  
Oklahoma City, OK 73134


Re: Hill Creek Unit 2-29F Well, 550' FNL, 2456' FEL, NW NE, Sec. 29, T. 10 South,  
R. 20 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35131.

Sincerely,



John R. Baza  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** Dominion Exploration & Production, Inc.  
**Well Name & Number** Hill Creek Unit 2-29F  
**API Number:** 43-047-35131  
**Lease:** U-28203

**Location:** NW NE                      **Sec.** 29                      **T.** 10 South                      **R.** 20 East

### **Conditions of Approval**

**1. General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

**2. Notification Requirements**

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

**3. Reporting Requirements**


All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER



Form approved.  
OMB No. 1004-0136  
Expires: November 30, 2000

007

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-28203
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		6. If Indian, Allottee or Tribe Name Ute Indian Tribe
2. Name of Operator Dominion Exploration & Production, Inc.		7. If Unit or CA Agreement, Name and No. Hill Creek Unit
3a. Address 14000 Quail Spgs Parkway, Okla. City, OK 73134		8. Lease Name and Well No. HCU 2-29F
3b. Phone No. (include area code) 405-749-1300		9. API Number
4. Location of Well (Report location clearly and in accordance with any state requirements.) At surface 550' FNL & 2456' FEL, NW/NE At proposed prod. zone		10. Field and Pool, or Exploratory Natural Buttes
14. Distance in miles and direction from nearest town or post office* 14.9 miles South of Ouray		11. Sec., T., R., M., or Blk and Survey or Area 29-10S-20E
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drlg. unit line, if any) 550'	16. No. of Acres in lease 1880	17. Spacing Unit dedicated to this well 40
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1100'	19. Proposed Depth 8,000	20. BLM/BIA Bond No. on file 76S 63050 0330
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5178'	22. Approximate date work will start* 15-Apr-04	23. Estimated duration 45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).    |
| 2. A Drilling Plan.   | 5. Operator certification.   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature <i>Carla Christian</i>	Name (Printed/Typed) Carla Christian	Date August 7, 2003
Title Regulatory Specialist		
Approved by (Signature) <i>Thomas R. Gump</i>	Name (Printed/Typed)	Date 12/08/2003
Title Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

**NOTICE OF APPROVAL**

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED

DEC 15 2003

DIV. OF OIL, GAS & MINING

**CONDITIONS OF APPROVAL ATTACHED**

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Dominion Exploration & Production Inc.

Well Name & Number: HCU 2-29F

API Number: 43-047-35131

Lease Number: UTU – 28203

Location: NWNE Sec. 29 TWN: 10S RNG: 20E

Agreement: HILL CREEK UNIT

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.



## CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

**Submit an electronic copy of all logs run on this well in LAS format. This submission will replace the requirement for submittal of paper logs to the BLM.**

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

### A. DRILLING PROGRAM

#### 1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands encountered to John Mayers of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

#### 2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

#### 3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the intermediate casing at least 200 ft. above the top of the Green River Formation, identified at  $\pm 1,060$  ft. and having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 4,930 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig. The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office.

All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman                      (435) 828-7874  
Petroleum Engineer

Kirk Fleetwood                (435) 828-7875  
Petroleum Engineer

BLM FAX Machine              (435) 781-4410

## EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids

**SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

Dominion Exploration and Production, Inc. (Dominion) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All Dominion personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

Dominion employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

Dominion employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

Dominion will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). Dominion shall receive written notification of authorization or denial of the requested modification. Without authorization, Dominion will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. Dominion shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified archaeologist accompanied by a Tribal Technician will monitor any trenching construction of the pipeline.

A corridor ROW, 60 feet wide and 790 feet long, shall be granted by BIA for the pipeline and for the access road. The constructed, travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required.

Culverts and diversion ditches will be placed and constructed where needed. Road base gravel will be used where sandy soils make roadways and the drilling location hazardous for access or drilling operations.

Upon completion of the pertinent APD and ROWs, Dominion will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion.

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

Dominion will implement "Safety and Emergency Plan" and ensure plan compliance.

Dominion shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontology resources (vertebrate fossils) are exposed or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

Dominion employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontology fossils. No significant cultural resources shall be disturbed.

Dominion will control noxious weeds on the well site and ROWs. Dominion will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

Reserve pits will be lined with an impervious synthetic liner. A fence will be constructed around the reserve pit until it is backfilled. Prior to backfilling the reserve pit, all fluids will be pumped from the pit into trucks and hauled, to approved disposal sites. When the reserve pits are backfilled, the surplus oil and mud, etc., will be buried a minimum of 3 feet below the surface of the soil.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids will be disposed of at approved disposal sites.

Surface pipelines will be constructed to lay on the soil surface. The pipeline portion of the ROW will not be bladed or cleared of vegetation without authorization of the BIA. Surface pipelines shall be welded in place at well sites or on access roads. They shall be pulled into place and assembled with suitable equipment. Vehicles shall not use pipeline ROWs as access roads unless specifically authorized.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, Dominion will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated, by reseeding all disturbed areas.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB NO. 1004-0135  
Expires: November 30, 2000

008

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.***SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-28203
2. Name of Operator DOMINION EXPL. & PROD., INC.		6. If Indian, Allottee or Tribe Name
Contact: CARLA CHRISTIAN E-Mail: Carla_M_Christian@dom.com		7. If Unit or CA/Agreement, Name and/or No.
3a. Address 14000 QUAIL SPRINGS PARKWAY, SUITE 600 OKLAHOMA CITY, OK 73134	3b. Phone No. (include area code) Ph: 405.749.5263 Fx: 405.749.6690	8. Well Name and No. HCU 2-29F
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 29 T10S R20E NWNE 550FNL 2456FEL		9. API Well No. 43-047-35131
		10. Field and Pool, or Exploratory NATURAL BUTTES
		11. County or Parish, and State UINTAH COUNTY, UT

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires August 18 2004. Dominion is hereby requesting a one year extension. Dominion would also like to eliminate the 13 3/8" surface casing and change the TD as reflected in the attached new drilling plan.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**  
Date: 08-13-04  
By: [Signature]

**COPY SENT TO OPERATOR**  
Date: 8-25-04  
Initials: CHD

**RECEIVED**  
**AUG 06 2004**  
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct. <b>Electronic Submission #33988 verified by the BLM Well Information System For DOMINION EXPL. &amp; PROD., INC., sent to the Vernal</b>	
Name (Printed/Typed) CARLA CHRISTIAN	Title AUTHORIZED REPRESENTATIVE
Signature <u>Carla Christian</u> (Electronic Submission)	Date 08/03/2004

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Office _____		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\***

**Federal Approval of this  
Action is Necessary**



## DRILLING PLAN

### APPROVAL OF OPERATIONS

#### Attachment for Permit to Drill

**Name of Operator:** Dominion Exploration & Production  
**Address:** 14000 Quail Springs Parkway, Suite 600  
Oklahoma City, OK 73134  
**Well Location:** HCU 2-29F  
550' FNL & 2456' FEL  
Section 29-10S-20E  
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	1,075'
Wasatch Tongue	3,985'
Green River Tongue	4,315'
Wasatch	4,475'
Chapita Wells	5,375'
Uteland Buttes	6,575'
Mesaverde	7,675'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	1,075'	Oil
Wasatch Tongue	3,985'	Oil
Green River Tongue	4,315'	Oil
Wasatch	4,475'	Gas
Chapita Wells	5,375'	Gas
Uteland Buttes	6,575'	Gas
Mesaverde	7,675'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	8-5/8"	32.0 ppf	J-55	STC	0'	2,000'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,400'	7-7/8"

Note: The drilled depth of the surface hole and the setting depth of the surface casing may vary from 1,700' to 2,000'. Should a lost circulation zone be encountered while drilling, casing will be set approximately 300' below the lost circulation zone. If no lost circulation zone is encountered, casing to be set at 2,000'±.

## DRILLING PLAN

### APPROVAL OF OPERATIONS

#### 5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized. Air foam mist, rotating head and diverter system will be utilized.

Production hole: Prior to drilling out the surface casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

#### 6. MUD SYSTEMS

- An air or an air/mist system may be used to drill to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' – 2,000'	8.4	Air foam mist, rotating head and diverter
2,000' – 8,400'	8.6	Fresh water/2% KCL/KCL mud system

#### 7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a contant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

#### 8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

#### 9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to surface casing.
- The gamma ray will be left on to record from total depth to surface casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to surface casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

#### 10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500–2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H2S gas.

## DRILLING PLAN

### APPROVAL OF OPERATIONS

#### 11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

#### 12. CEMENT SYSTEMS

##### a. Surface Cement:

- Drill 12-1/4" hole to 2,000'±, run and cement 8-5/8" to surface (depth to vary based on depth of lost circulation zone).
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement the casing annulus to surface. Top out jobs to be performed if needed. Depending to depth of top of cement in the annulus, a 1" tubing string may or may not be utilized.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	252	0'-1,500'	11.0 ppg	3.82 CFS	619 CF	835 CF	35%
Tail	219	1,500'-2,000'	15.6 ppg	1.18 CFS	220 CF	297 CF	35%
Top Out	100	0'-200'	15.6 ppg	1.18 CFS	95 CF	118 CF	24% (if required)

Lead Mix: Premium Plus V blend. Blend includes Class "G" cement, gel, salt, gilsonite.  
Slurry yield: 3.82 cf/sack      Slurry weight: 11.00 #/gal.  
Water requirement: 22.95 gal/sack

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.  
Slurry yield: 1.18 cf/sack      Slurry weight: 15.60 #/gal.  
Water requirement: 5.2 gal/sack

Top Out: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.  
Slurry yield: 1.18 cf/sack      Slurry weight: 15.60 #/gal.  
Water requirement: 5.2 gal/sack

##### c. Production Casing Cement:

- Drill 7-7/8" hole to 8,400'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,400'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: A caliper log will be ran to determine cement volume requirements.

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.  
Slurry yield: 3.12 cf/sack      Slurry weight: 11.60 #/gal.  
Water requirement: 17.71 gal/sack  
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.  
Slurry yield: 1.75 cf/sack      Slurry weight: 13.00 #/gal.  
Water requirement: 9.09 gal/sack  
Compressives @ 165°F: 905 psi after 24 hours

#### 13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: January 15, 2005  
Duration: 14 Days

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 43-047-35131  
**Well Name:** HCU 2-29F  
**Location:** Section 29-10S-20E, 550' FNL & 2456' FEL  
**Company Permit Issued to:** Dominion Exploration & Production, Inc.  
**Date Original Permit Issued:** 8/18/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Carla Christian  
Signature

8/3/2004

Date

**Title:** Regulatory Specialist

**Representing:** Dominion Exploration & Production, Inc.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB NO. 1004-0135  
Expires: November 30, 2000**SUNDRY NOTICES AND REPORTS ON WELLS****Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.**

006

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**5. Lease Serial No.  
UTU282036. If Indian, Allottee or Tribe Name  
UINTAH AND OURAY7. If Unit or CA/Agreement, Name and/or No.  
UTU76784A8. Well Name and No.  
HCU 2-29F9. API Well No.  
43-047-35131-00-X110. Field and Pool, or Exploratory  
HILL CREEK11. County or Parish, and State  
UINTAH COUNTY, UT1. Type of Well  
☐ Oil Well ☒ Gas Well ☐ Other2. Name of Operator  
DOMINION EXPL & PRODUCTION INCContact: CARLA CHRISTIAN  
E-Mail: Carla\_M\_Christian@dom.com3a. Address  
14000 QUAIL SPRINGS PKWY, #600  
OKLAHOMA CITY, OK 73134-26003b. Phone No. (include area code)  
Ph: 405.749.5263  
Fx: 405.749.66904. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 29 T10S R20E NWNE 550FNL 2456FEL**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires August 18 2004. Dominion is hereby requesting a one year extension. Dominion would also like to eliminate the 13 3/8" surface casing and change the TD as reflected in the attached new drilling plan.

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #33988 verified by the BLM Well Information System  
For DOMINION EXPL & PRODUCTION INC, sent to the Vernal  
Committed to AFMSS for processing by LESLIE WALKER on 08/06/2004 (04LW4608SE)**

Name (Printed/Typed) CARLA CHRISTIAN

Title AUTHORIZED REPRESENTATIVE

Signature (Electronic Submission)

Date 08/03/2004

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By KIRK FLEETWOOD

Title PETROLEUM ENGINEER

Date 09/07/2004

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Vernal

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\***

## Revisions to Operator-Submitted EC Data for Sundry Notice #33988

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	APDCH NOI	APDCH NOI
Lease:	U-28203	UTU28203
Agreement:		UTU76784A
Operator:	DOMINION EXPL. & PROD., INC. 14000 QUAIL SPRINGS PARKWAY, SUITE 600 OKLAHOMA CITY, OK 73134 Ph: 405.749.5263 Fx: 405.749.6690	DOMINION EXPL & PRODUCTION INC 14000 QUAIL SPRINGS PKWY, #600 OKLAHOMA CITY, OK 73134-2600 Ph: 405.749.5273
Admin Contact:	CARLA CHRISTIAN AUTHORIZED REPRESENTATIVE E-Mail: Carla_M_Christian@dom.com  Ph: 405.749.5263 Fx: 405.749.6690	CARLA CHRISTIAN AUTHORIZED REPRESENTATIVE E-Mail: Carla_M_Christian@dom.com  Ph: 405.749.5263 Fx: 405.749.6690
Tech Contact:		
Location:		
State:	UT	UT
County:	UINTAH	UINTAH
Field/Pool:	NATURAL BUTTES	HILL CREEK
Well/Facility:	HCU 2-29F Sec 29 T10S R20E NWNE 550FNL 2456FEL	HCU 2-29F Sec 29 T10S R20E NWNE 550FNL 2456FEL

Dominion Exploration and Prod. Inc.  
APD Extension

Well: HCU 2-29F

Location: NWNE Sec. 29, T10S, R20E

Lease: U-28203

**Conditions of Approval**

An extension for the referenced APD is granted with the following condition(s):

1. The extension will expire 12/7/05
2. No other extensions beyond that time frame will be granted or allowed.

If you have any other questions concerning this matter, please contact Kirk Fleetwood at (435) 781-4486.

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

009

**ENTITY ACTION FORM**

Operator: Dominion Exploration & Production, Inc.  
Address: 14000 Quail Springs Parkway, Suite 600  
city Oklahoma City  
state Ok zip 73134

Operator Account Number: N 1095

Phone Number: (405) 749-1300

**Well 1**

API Number	Well Name	QQ	Sec	Twp	Rng	County
43-047-35131	HCU 2-29F	NWNE	29	10S	20E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date	Entity Assignment Effective Date		
<i>C</i> <u>AB</u>	<u>99999</u>	<u>12829</u>	<u>11/6/2004</u>	<u>11/30/04</u>		<i>K</i>
Comments: <u>MURD = WSMVD</u>						

**Well 2**

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date	Entity Assignment Effective Date		
Comments:						

**Well 3**

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date	Entity Assignment Effective Date		
Comments:						

**ACTION CODES:**

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

**RECEIVED**

**NOV 29 2004**

Carla Christian

Name (Please Print)

*Carla Christian*

Signature

Regulatory Specialist

Title

11/22/2004

Date



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires: November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

010

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

DOMINION EXPLORATION & PRODUCTION, INC.

3a. Address Suite 600  
14000 QUAIL SPGS PKWY, OKLA CITY, OK 73134

3b. Phone No. (include area code)  
405-749-1300

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

550' FNL & 2456' FEL, Sec. 29-10S-20E

RECEIVED  
DEC 03 2004

5. Lease Serial No.

U-28203

6. If Indian, Allottee or Tribe Name

Ute Indian Tribe

7. If Unit or CA/Agreement, Name and/or No.

Hill Creek Unit

8. Well Name and No.

HCU 2-29F

9. API Well No.

43-047-35131

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah Co., Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF GAS & MINING  
IN. OF OIL, GAS & MINING, REPORT OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Drilling Operations
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Spud well 11/6/04. 11/8/04 ran 55 jts. 8 5/8", 32#, J-55, ST&C 8rd csg., set @ 2350'. Cemented lead w/260 sks Hi-Fill V, 11.0 ppg, 3.82 cuft/sk, tailed w/250 sks G, 15.8 ppg, 1.15 cuft/sk, no cmt. to surface. Top out w/425 sks G, first pump 75 sks, second pump 125 sks, third pump 225 sks cmt. to surface and stayed. 11/17/04 ran 199 jts. 5 1/2", 17#, M-80, LT&C 8rd csg., set @ 8408'. Cemented lead w/100 sks Hi-Fill V, 11.6 ppg, 3.12 cuft/sk., tailed w/780 sks HLC Type V, 13.0 ppg, 1.69 cuft/sk. Bumped plug, checked floats, floats held. Released rig. 11/24/04 perf and frac stages 1 thru 3.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

*Carla Christian*

Date 30-Nov-04

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED  
DEC 06 2004

FORM APPROVED  
OMB No. 1004-0135  
Expires: November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

011

DIV. OF OIL, GAS & MINING

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

DOMINION EXPLORATION & PRODUCTION, INC.

3a. Address Suite 600  
14000 QUAIL SPGS PKWY, OKLA CITY, OK 73134

3b. Phone No. (include area code)  
405-749-1300

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

550' FNL & 2456' FEL, Sec. 29-10S-20E

5. Lease Serial No.

U-28203

6. If Indian, Allottee or Tribe Name

Ute Indian Tribe

7. If Unit or CA/Agreement, Name and/or No.

Hill Creek Unit

8. Well Name and No.

HCU 2-29F

9. API Well No.

43-047-35131

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah Co., Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Drilling Operations
<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

First sales 12/01/04.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Carla Christian

Title Regulatory Specialist

Signature

*Carla Christian*

Date

2-Dec-04

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

## WELL COMPLETION OR RECOMPLETION REPORT

FORM APPROVED  
OMB NO. 1004-0137

Expires: November 30, 2000

012

5. Lease Serial No.

U-28203

1a. Type of Well ☐ Oil Well ☒ Gas Well ☐ Dry ☐ Otherb. Type of Completion: ☒ New Well ☐ Work Over ☐ Deepen ☐ Diff. Resvr.

Other

2. Name of Operator

Dominion Exploration &amp; Production, Inc.

3. Address

14000 Quail Springs Parkway - Ste. 600 - Okla. City, OK 73134

3a. Phone No. (include area code)

405-749-1300

4. Location of Well (Report location clearly and in accordance with Federal requirements)\*

At surface

550' ENL &amp; 240' FEL NWNE

At top prod. interval reported below

At total depth

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

Hill Creek Unit

8. Lease Name and Well No.

HCU 2-29F

9. API Well No.

43-047-35131

10. Field and Pool, or Exploratory

Natural Buttes

11. Sec., T., R., M., or Block and  
Survey or Area

29-10S-20E

12. County or Parish

Uintah

13. State

UT

14. Date Spudded

11/06/2004

15. Date First Reached

11/16/2004

16. Date Completed

☐ D&A☒ Ready to prod.

12/01/2004

17. Elevations (DF, RKB, RT, GL)\*

5178' GL

18. Total Depth: MD 8422'  
TVD19. Plug Back T.D.: MD 8345'  
TVD20. Depth Bridge Plug Set: MD  
TVD

21. Type Electric &amp; Other Mechanical Logs Run (Submit copy of each)

Dual/Micro Laterolog, Comp. Z-Densilog, Comp. Neutron

Gamma Ray/Caliper Log, Cement Bond Log

22. Was well cored? ☒ No ☐ Yes (Submit analysis)Was DST run? ☒ No ☐ Yes (Submit report)Directional Survey? ☒ No ☐ Yes (Submit copy)

23. Casing and Liner Record (Report all string set in well)

Hole Size	Size/Grade	Wt. (#/ft)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12 1/4"	8 5/8"	32#	Surface	2,350'		935 Sx		Circ.	
7 7/8"	5 1/2"	17#	Surface	8,408'		880 Sx		Est. TOC @ 2,910'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2 3/8"	8205'							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesaverde	8113'	8224'	(8113- 17, 8121- 24, 8171-78 8209- 12, 8220-24)		61	Open
B) Mesaverde	7901'	8018'	7901- 12, 7956- 68, 8015- 18		61	Open
C) Mesaverde	7788'	7846'	7788- 95, 7828- 46		52	Open
D) Uteland Buttes	7149'	7392'	(7149- 54, 7249-57, 7350- 54 7388- 92)		62	Open
E) Uteland Buttes	6911'	6931'	6911- 31		61	Open
F) Wastach/Chapita Wells	5347'	5434'	5347- 50, 5426- 34		52	Open
G)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
8113' - 8224'	Frac w/77,778# 20/40 PR 6000 sd. w/463.1 mscf of N2 and 880 bbls of YF120ST.
7901' - 8018'	Frac w/50,482# 20/40 Ottawa sd. w/190.1 mscf of N2 and 480 bbls of YF120ST.
7788' - 7846'	Frac w/54,045# 20/40 Ottawa sd. w/281.9 mscf of N2 and 449 bbls of YF120ST.
7149' - 7392'	Frac w/62,144# 20/40 Ottawa sd. w/199.7 mscf of N2 and 565 bbls of YF115ST.
6911' - 6931'	Frac w/33,625# 20/40 Ottawa sd. w/127.3 mscf of N2 and 387 bbls of YF115ST.
5347' - 5434'	Frac w/40,958# 20/40 Ottawa sd. w/154.7 mscf of N2 and 322 bbls of YF115ST.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
12/01/2004	1/26/2005	24	→	7	1367	27			Flowing
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
48	150	627	→	7	1367	27	1;195,286		Producing

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						

(See instructions and spaces for additional data on reverse side)

28b Production - Interval C									
Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c Production - Interval D									
Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

30. Summary of Porous Zones (Include Aquifers):				31. Formation (Log) Markers	
Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.					
Formation	Top	Bottom	Description, Contents, etc.	Name	Top Meas. Depth
				Wasatch Tongue	3977'
				Uteland Limestone	4328'
				Wasatch	4487'
				Chapita Wells	5416'
				Uteland Buttes	6575'
				Mesaverde	7402'

32. Additional remarks (include plugging procedure)

33. Circle enclosed attachments:

- ☒ 1. Electrical/Mechanical Logs (1 full set req'd)     
 2. Geologic Report     
 3. DST Report     
 4. Directional Survey  
 5. Sundry Notice for plugging and cement verification     
 6. Core Analysis     
 7. Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Carla Christian      Title Regulatory Specialist  
 Signature Carla Christian      Date February 4, 2005

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. DJJ
2. CDW

**X - Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2007

**FROM: (Old Operator):**

N1095-Dominion Exploration & Production, Inc  
 14000 Quail Springs Parkway, Suite 600  
 Oklahoma City, OK 73134

Phone: 1 (405) 749-1300

**TO: ( New Operator):**

N2615-XTO Energy Inc  
 810 Houston St  
 Fort Worth, TX 76102

Phone: 1 (817) 870-2800

**CA No.**

**Unit:**

**HILL CREEK**

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST								

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/6/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/6/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 8/6/2007
- a. Is the new operator registered in the State of Utah: \_\_\_\_\_ Business Number: 5655506-0143
- b. If **NO**, the operator was contacted on: \_\_\_\_\_
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**  
The BLM or BIA has approved the successor of unit operator for wells listed on: \_\_\_\_\_
- Federal and Indian Communization Agreements ("CA"):**  
The BLM or BIA has approved the operator for all wells listed within a CA on: \_\_\_\_\_
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: \_\_\_\_\_

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 9/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/27/2007
- Bond information entered in RBDMS on: 9/27/2007
- Fee/State wells attached to bond in RBDMS on: 9/27/2007
- Injection Projects to new operator in RBDMS on: 9/27/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: 9/27/2007

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: UTB000138
- Indian well(s) covered by Bond Number: n/a
- a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 104312762
- b. The **FORMER** operator has requested a release of liability from their bond on: 1/23/2008

The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: \_\_\_\_\_

**COMMENTS:**

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: XTO Energy Inc. <i>N 2615</i>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 810 Houston Street CITY Fort Worth STATE TX ZIP 76102		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: SEE ATTACHED		8. WELL NAME and NUMBER: SEE ATTACHED
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		9. API NUMBER: SEE ATTACHED
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Natural Buttes
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective July 1, 2007, XTO Energy Inc. has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc.  
14000 Quail Springs Parkway, Suite 600  
Oklahoma City, OK 73134

*N 1095*

*James D. Abercrombie*  
James D. Abercrombie  
Sr. Vice President, General Manager - Western Business Unit  
*(405) 749-1300*

Please be advised that XTO Energy Inc. is considered to be the operator on the attached list and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by Nationwide BLM Bond #104312750 and Department of Natural Resources Bond #104312762.

NAME (PLEASE PRINT) <u>Edwin S. Ryan, Jr.</u>	TITLE <u>Sr. Vice President - Land Administration</u>
SIGNATURE <i>Edwin S. Ryan, Jr.</i>	DATE <u>7/31/2007</u>

(This space for State use only)

APPROVED *9127107*

*Earlene Russell*  
Division of Oil, Gas and Mining  
Earlene Russell, Engineering Technician

(See Instructions on Reverse Side)

RECEIVED

AUG 06 2007

DIV. OF OIL, GAS & MINING

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr_qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304731522	FEDERAL 1-29	SWNW	29	100S	200E	U-28203	12829	Federal	GW	P
4304731601	HILLCREEK FED 1-30	NWSW	30	100S	200E	U-30693	12829	Federal	GW	P
4304731675	HILL CREEK FED 1-27	SENW	27	100S	200E	U-29784	12829	Federal	GW	P
4304733671	HCU 1-28F	NENE	28	100S	200E	14-20-H62-4783	12829	Indian	GW	S
4304733672	HCU 1-29F	NENE	29	100S	200E	U-28203	12829	Federal	GW	P
4304733673	HCU 2-30F	NWNE	30	100S	200E	UTU-29784	12829	Federal	GW	P
4304733688	HCU 3-28F	NENW	28	100S	200E	U-28203	12829	Federal	GW	P
4304733689	HCU 3-29F	NENW	29	100S	200E	U-28203	12829	Federal	GW	P
4304733713	HCU 3-30F	NWNW	30	100S	200E	UTU-30693	12829	Federal	GW	P
4304733835	HCU 5-30F	SWNW	30	100S	200E	U-30693	12829	Federal	GW	P
4304733836	HCU 6-30F	SENW	30	100S	200E	U-30693	12829	Federal	GW	P
4304733964	HCU 8-30F	SENE	30	100S	200E	UTU-29784	12829	Federal	GW	P
4304733965	HCU 11-30F	NESW	30	100S	200E	U-30693	12829	Federal	GW	P
4304733966	HCU 13-30F	SWSW	30	100S	200E	U-30693	12829	Federal	GW	P
4304734045	HCU 5-28F	SWNW	28	100S	200E	U-28203	12829	Federal	GW	P
4304734046	HCU 7-29F	SWNE	29	100S	200E	U-28203	12829	Federal	GW	P
4304734223	HCU 9-29F	NESE	29	100S	200E	U-28203	12829	Federal	GW	P
4304734298	HCU 3-31F	NWNW	31	100S	200E	UTU-30693	12829	Federal	GW	P
4304734299	HCU 5-31F	SWNW	31	100S	200E	UTU-30693	12829	Federal	GW	P
4304734300	HCU 7-31F	SENW	31	100S	200E	UTU-30693	12829	Federal	GW	P
4304734316	HCU 2-27F	NWNE	27	100S	200E	UTU-79130	12829	Federal	GW	P
4304734351	HCU 8-27F	SENE	27	100S	200E	UTU-79130	12829	Federal	GW	P
4304734352	HCU 11-31F	NWSW	31	100S	200E	UTU-30693	12829	Federal	GW	P
4304734353	HCU 13-31F	SWSW	31	100S	200E	UTU-30693	12829	Federal	GW	P
4304734853	HCU 1-33F	NENE	33	100S	200E	14-20-H62-4782	12829	Indian	GW	P
4304734854	HCU 3-34F	NENW	34	100S	200E	U-28203	12829	Federal	GW	P
4304734913	HCU 1-27F	NENE	27	100S	200E	U-79130	12829	Federal	GW	P
4304734914	HCU 3-27F	NENW	27	100S	200E	U-79130	12829	Federal	GW	P
4304734915	HCU 7-27F	SWNE	27	100S	200E	U-79130	12829	Federal	GW	S
4304734916	HCU 10-27F	NWSE	27	100S	200E	U-79130	12829	Federal	GW	P
4304734917	HCU 14-30F	SWSW	30	100S	200E	U-30693	12829	Federal	GW	P
4304734918	HCU 15-30F	SWSE	30	100S	200E	U-29784	12829	Federal	GW	P
4304734919	HCU 2-31F	NWNE	31	100S	200E	U-30693	12829	Federal	GW	P
4304734920	HCU 6-31F	SWNW	31	100S	200E	U-30693	12829	Federal	GW	P
4304734921	HCU 4-31F	NWNW	31	100S	200E	U-30693	12829	Federal	GW	P
4304735130	HCU 11-27F	NESW	27	100S	200E	U-29784	12829	Federal	GW	P
4304735131	HCU 2-29F	NWNE	29	100S	200E	U-28203	12829	Federal	GW	P
4304735132	HCU 9-30F	NESE	30	100S	200E	U-29784	12829	Federal	GW	P
4304735133	HCU 10-30F	NWSE	30	100S	200E	U-29784	12829	Federal	GW	P
4304735134	HCU 1-31F	NENE	31	100S	200E	U-36903	12829	Federal	GW	P
4304735135	HCU 12-31F	NWSW	31	100S	200E	U-30693	12829	Federal	GW	P
4304735137	HCU 2-33F	NENE	33	100S	200E	U-28203	12829	Federal	GW	P
4304735139	HCU 5-34F	NENW	34	100S	200E	U-28203	12829	Federal	GW	P
4304735154	HCU 13-27F	NESW	27	100S	200E	U-29784	12829	Federal	GW	P
4304735230	HCU 8-33F	SENE	33	100S	200E	14-20-H62-4782	12829	Indian	GW	P
4304735307	HCU 6-29F	SENW	29	100S	200E	U-28203	12829	Federal	GW	P
4304735470	HCU 11-29F	NESW	29	100S	200E	U-28203	12829	Federal	GW	P
4304735471	HCU 10-29F	NWSE	29	100S	200E	U-28203	12829	Federal	GW	P

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr_qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304735507	HCU 12-29FA	NESW	29	100S	200E	U-28203	12829	Federal	GW	DRL
4304735724	HCU 16-27F	SESE	27	100S	200E	U-79130	12829	Federal	GW	P
4304735725	HCU 9-27F	NESE	27	100S	200E	U-79130	12829	Federal	GW	P
4304735726	HCU 15-27F	SWSE	27	100S	200E	U-79130	12829	Federal	GW	P
4304735727	HCU 9-34F	NESE	34	100S	200E	U-79130	12829	Federal	GW	P
4304735728	HCU 7-34F	SWNE	34	100S	200E	U-79130	12829	Federal	GW	P
4304735832	HCU 9-33F	NESE	33	100S	200E	U-28203	12829	Federal	GW	P
4304735833	HCU 16-33F	SESE	33	100S	200E	U-28203	12829	Federal	GW	P
4304735835	HCU 11-34F	NESW	34	100S	200E	U-28203	12829	Federal	GW	P
4304735836	HCU 12-34F	NWSW	34	100S	200E	U-28203	12829	Federal	GW	P
4304735837	HCU 13-34F	SWSW	34	100S	200E	U-28203	12829	Federal	GW	P
4304735838	HCU 15-34F	SWSE	34	100S	200E	U-79130	12829	Federal	GW	P
4304735875	HCU 14-34F	SWSE	34	100S	200E	U-79130	12829	Federal	GW	P
4304735934	HCU 8-31F	SENE	31	100S	200E	U-30693	12829	Federal	GW	P
4304735935	HCU 10-31F	NWSE	31	100S	200E	U-30693	12829	Federal	GW	P
4304735936	HCU 9-31F	NWSE	31	100S	200E	U-30693	12829	Federal	GW	P
4304735939	HCU 16-28F	SESE	28	100S	200E	U-28203	12829	Federal	GW	P
4304735940	HCU 6-34F	SENE	34	100S	200E	U-28203	12829	Federal	GW	P
4304735996	HCU 16-34F	SESE	34	100S	200E	U-79130	12829	Federal	GW	P
4304736046	HCU 14-31F	SWSW	31	100S	200E	U-30693	12829	Federal	GW	P
4304736251	HCU 16-30F	NESE	30	100S	200E	U-29784	12829	Federal	GW	P
4304736319	HCU 10-28F	NWSE	28	100S	200E	U-28203	12829	Federal	GW	P
4304736320	HCU 13-28F	SWSW	28	100S	200E	U-28203	12829	Federal	GW	P
4304736321	HCU 14-28F	SESW	28	100S	200E	U-28203	12829	Federal	GW	P
4304736437	HCU 5-27F	SWNW	27	100S	200E	U-29784	12829	Federal	GW	DRL
4304736438	HCU 4-27F	SWNW	27	100S	200E	U-29784	12829	Federal	GW	DRL
4304736439	HCU 11-28F	NESW	28	100S	200E	U-28203	12829	Federal	GW	P
4304736440	HCU 5-30F2	SWNW	30	100S	200E	U-30693	12829	Federal	GW	DRL
4304736601	HCU 5-33F	SWNW	33	100S	200E	U-28203	12829	Federal	GW	P
4304736602	HCU 12-33F	NWSW	33	100S	200E	U-28203	12829	Federal	GW	P
4304736603	HCU 6-28F	SENE	28	100S	200E	U-28203	12829	Federal	GW	S
4304736604	HCU 12-28F	NWSW	28	100S	200E	U-28203	12829	Federal	GW	P
4304736685	HCU 13-33F	SWSW	33	100S	200E	U-28203	12829	Federal	GW	P
4304736846	HCU 9-28F	NESE	28	100S	200E	14-20-H62-4781	12829	Indian	GW	P
4304736847	HCU 8-28F	SENE	28	100S	200E	14-20-H62-4783	12829	Indian	GW	P
4304736848	HCU 7-28F	SWNE	28	100S	200E	U-28203	12829	Federal	GW	P
4304736849	HCU 1-34F	NENE	34	100S	200E	U-79130	12829	Federal	GW	P
4304736852	HCU 14-27F	NESW	27	100S	200E	U-29784	12829	Federal	GW	DRL
4304736853	HCU 16-29F	SESE	29	100S	200E	U-28203	12829	Federal	GW	P
4304737060	HCU 4-33F	NWNW	33	100S	200E	U-28203	12829	Federal	GW	P
4304737202	HCU 6-33F	SENE	33	100S	200E	U-28203	12829	Federal	GW	P
4304737203	HCU 3-33F	NWNE	33	100S	200E	U-28203	12829	Federal	OW	P
4304737204	HCU 15-28F	NWNE	33	100S	200E	14-20-H62-4781	12829	Indian	OW	P
4304737284	HCU 7-30F	SENE	30	100S	200E	U-29784	99999	Federal	OW	DRL
4304737340	HCU 5-29F	SWNW	29	100S	200E	U-28203	12829	Federal	GW	P
4304737360	HCU 11-33F	NWSW	33	100S	200E	U-28203	12829	Federal	GW	P
4304737424	HCU 12-27F	NESW	27	100S	200E	U-29784	12829	Federal	OW	DRL
4304737425	HCU 14-29F	SWSW	29	100S	200E	U-28203	12829	Federal	GW	P



N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr_qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304737426	HCU 13-29F	SWSW	29	100S	200E	U-28203	12829	Federal	GW	P
4304737427	HCU 8-29F	NESE	29	100S	200E	U-28203	12829	Federal	GW	P
4304737445	HCU 8-34F	SENE	34	100S	200E	U-79130	12829	Federal	OW	S
4304737446	HCU 2-34F	NWNE	34	100S	200E	U-79130	12829	Federal	OW	DRL
4304737447	HCU 7-33F	SENE	33	100S	200E	U-28203	12829	Federal	OW	DRL
4304737570	HCU 10-33F	NWSE	33	100S	200E	14-20-H62-4782	12829	Indian	GW	P
4304737749	HCU 4-28F	NENW	28	100S	200E	U-28203	99999	Federal	GW	DRL
4304737750	HCU 14-33F	SWSE	33	100S	200E	U-028203	12829	Federal	GW	DRL
4304731560	HILL CREEK ST 1-32	SENE	32	100S	200E	ML-22313	12829	State	GW	P
4304734852	HCU 4-32F	NWNW	32	100S	200E	ML-22313-2	12829	State	GW	P
4304735136	HCU 5-32F	SWNW	32	100S	200E	ML-22313-2	12829	State	GW	P
4304735870	HCU 13-32F	NESE	31	100S	200E	ML-22313-2		State	GW	LA
4304735871	HCU 12-32F	NESE	31	100S	200E	ML-22313-2		State	GW	LA
4304735872	HCU 14-32F	SESW	32	100S	200E	ML-22313-2	12829	State	GW	P
4304735873	HCU 3-32F	NENW	32	100S	200E	ML-22313-2	12829	State	GW	DRL
4304735874	HCU 11-32F	SENE	32	100S	200E	ML-22313-2	12829	State	D	PA
4304736322	HCU 16-32F	SESE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736323	HCU 9-32F	NESE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736324	HCU 8-32F	SENE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736441	HCU 1-32F2	NENE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736684	HCU 7-32F	SENE	32	100S	200E	ML-22313-2	12829	State	GW	P



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155



IN REPLY REFER TO  
3180  
UT-922

Dominion Exploration & Production, Inc.  
Attn: James D. Abercrombie  
14000 Quail Springs Parkway, #600  
Oklahoma City, OK 73134-2600

August 10, 2007

Re: Hill Creek Unit  
Uintah County, Utah

Gentlemen:

On August 8, 2007, we received an indenture dated June 30, 2007, whereby Dominion Exploration & Production, Inc. resigned as Unit Operator and XTO Energy Inc. was designated as Successor Unit Operator for the Hill Creek Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective August 15, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Hill Creek Unit Agreement.

Your statewide oil and gas Bond No. UTB000138 will be used to cover all operations within the River Bend Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble  
Acting Chief, Branch of Fluid Minerals

Enclosure

RECEIVED

AUG 16 2007

DIV. OF OIL, GAS & MINING

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-28203
<b>1. TYPE OF WELL</b> Gas Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b> UTE
<b>2. NAME OF OPERATOR:</b> XTO ENERGY INC		<b>7. UNIT or CA AGREEMENT NAME:</b> HILL CREEK
<b>3. ADDRESS OF OPERATOR:</b> 382 Road 3100 , Aztec, NM, 87410		<b>8. WELL NAME and NUMBER:</b> HCU 2-29F
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0550 FNL 2456 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWNE Section: 29 Township: 10.0S Range: 20.0E Meridian: S		<b>9. API NUMBER:</b> 43047351310000
<b>PHONE NUMBER:</b> 505 333-3159 Ext		<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>COUNTY:</b> UINTAH		<b>STATE:</b> UTAH
<b>11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA</b>		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start:	<input checked="" type="checkbox"/> <b>ACIDIZE</b>	
<input checked="" type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion: 10/19/2009	<input type="checkbox"/> <b>ALTER CASING</b>	
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> <b>CASING REPAIR</b>	
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> <b>CHANGE TO PREVIOUS PLANS</b>	
	<input type="checkbox"/> <b>CHANGE TUBING</b>	
	<input type="checkbox"/> <b>CHANGE WELL STATUS</b>	
	<input type="checkbox"/> <b>COMMINGLE PRODUCING FORMATIONS</b>	
	<input type="checkbox"/> <b>DEEPEN</b>	
	<input type="checkbox"/> <b>FRACTURE TREAT</b>	
	<input type="checkbox"/> <b>OPERATOR CHANGE</b>	
	<input type="checkbox"/> <b>PLUG AND ABANDON</b>	
	<input type="checkbox"/> <b>PRODUCTION START OR RESUME</b>	
	<input type="checkbox"/> <b>RECLAMATION OF WELL SITE</b>	
	<input type="checkbox"/> <b>REPERFORATE CURRENT FORMATION</b>	
	<input type="checkbox"/> <b>SIDETRACK TO REPAIR WELL</b>	
	<input type="checkbox"/> <b>TUBING REPAIR</b>	
	<input type="checkbox"/> <b>VENT OR FLARE</b>	
	<input type="checkbox"/> <b>WATER SHUTOFF</b>	
	<input type="checkbox"/> <b>SI TA STATUS EXTENSION</b>	
	<input type="checkbox"/> <b>WILDCAT WELL DETERMINATION</b>	
	<input type="checkbox"/> <b>OTHER:</b> _____	
<b>12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.</b> XTO Energy Inc. has completed acidizing this well. Please see the attached Morning Report.		
<b>Accepted by the          Utah Division of          Oil, Gas and Mining          FOR RECORD ONLY</b> November 02, 2009		
<b>NAME (PLEASE PRINT)</b> Barbara Nicol	<b>PHONE NUMBER</b> 505 333-3642	<b>TITLE</b> Regulatory Clerk
<b>SIGNATURE</b> N/A	<b>DATE</b> 10/30/2009	

# EXECUTIVE SUMMARY REPORT

9/29/2009 - 10/30/2009  
Report run on 10/30/2009 at 3:04 PM

## Hill Creek Unit 02-29F

Section 29-10S-20E, Uintah, Utah, Roosevelt  
Objective: Prep for acid job  
Date First Report: 10/5/2009

10/5/2009 MIRU Production Logging Services SLU. SN @ 8,204'. RU & RIH w/fishing tls. Fish plngr & BHBS w/SV from SN. LD fishing tls. RU & RIH w/1.625" BB tgd fill @ 8,325'. POH & Ld BB. RU & RIH w/1.908' tbg broach to SN. No tight spots. POH & Ld tbg broach. RDMO Production Logging Services. SWI. Suspend until further activity.

10/12/2009 ===== Hill Creek Unit 02-29F =====  
MIRU FracTech Services. SN @ 8,204'. NU to tbg. PT line to 2,500 psig, good test. Pmp 250 gal 15% HCL acid w/additives. Wait 30 min. Pmp 32 BBL kcl substitute flush. ND from tbg, NU to csg. PT line to 2,500 psig, good test. Pmp 250 gal 15% HCL acid w/additives, Wait 15 min. Pmp 10 bbl kcl flush, wait 15 min. Pmp 250 gal 15% HCL, wait 30 min. Pmp 58 bbl kcl flush. ND from csg. RDMO FracTech Services. SITP 0 psig, SICP 0 psig. SWI. Suspend test data, pending swab.

10/14/2009 ===== Hill Creek Unit 02-29F =====  
MIRU D&S Swabbing SWU. SN @ 8,204'. BFL @ 7,100' FS. S 0 BO, 3 BW. 7 runs, 5 hrs. well would not KO. Swabber was tagging good fluid and not getting anything to surface. SWI, RDMO. We will SL on Friday.

10/19/2009 ===== Hill Creek Unit 02-29F =====  
MIRU D&S Swabbing SWU. SN @ 8,204'. RU & RIH w/swb tls. BD tbg. BFL @ 7,400' FS, 0 BO, 6 BW, 6 runs, 5 hrs, FFL @ 7,400' FS. KO well flwg. SITP 300 psig, SICP 400 psig. RDMO D&S Swabbing SWU. RWTP @ 12:00 p.m., 10/19/09. Final rpt.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-28203
		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b> UTE
<b>1. TYPE OF WELL</b> Gas Well		<b>7. UNIT or CA AGREEMENT NAME:</b> HILL CREEK
<b>2. NAME OF OPERATOR:</b> XTO ENERGY INC		<b>8. WELL NAME and NUMBER:</b> HCU 2-29F
<b>3. ADDRESS OF OPERATOR:</b> PO Box 6501, Englewood, CO, 80155		<b>9. API NUMBER:</b> 43047351310000
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0550 FNL 2456 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWNE Section: 29 Township: 10.0S Range: 20.0E Meridian: S		<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
		<b>COUNTY:</b> UINTAH
		<b>STATE:</b> UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input checked="" type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 10/12/2016	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input type="text"/>	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy Inc. performed an Acid Treatment on this well per the following: 10/07/16: MIRU SLU. Rec plngr & BHBS. Tgd @ 8,246'. RDMO SLU. 10/10/16: MIRU pmp trk. Pump 500 gals 15% HCL w/additives & flush w/30 bbls TFW down csg, pump 250 gals 15% HCL w/additives & flush w/32 bbls TFW down tbg. RDMO pmp trk. SWI for swab. 10/11/16: MIRU SWU. RIH w/swb tl's. 10/12/16: RIH w/swb tl's. RDMO SWU.

**Accepted by the**  
**Utah Division of**  
**Oil, Gas and Mining**  
**FOR RECORD ONLY**  
 November 28, 2016

<b>NAME (PLEASE PRINT)</b> Rhonda Smith	<b>PHONE NUMBER</b> 505 333-3215	<b>TITLE</b> Regulatory Clerk
<b>SIGNATURE</b> N/A		<b>DATE</b> 11/17/2016